

SHEAN IRON STEEL

Timber Connector • Foundation • Farm Supply • Garden Supply • Building Material

#### Who We Are

Shean Iron Steel Co.,Ltd was founded in 2007. We are located in Hebei,north to Beijing, which brings great convenience in traffic.We act as manufacturer and trader.

#### Our Philosophy

The core is how to better serve customers. On the service side, Shean Iron Steel Co.,Ltd does not simply sell goods, but provides a solution to customers, who truly regards customers as their own friends and family, and tries hard to be the customer's support.

#### What We do

We have 5 categories: farm supply, foundations, garden supply, timber connectors, and building matieral.

We will provide customers with abundant products, good price and nice quality so as to reassure customers with ease and comfort.


### Our Advantage

- 1. Good product is a good thing for a successful get-together.
- 2. Refined management.
- 3. Rest assured on free sample.
- 4. Stock to solve customers' urgent needs.




### TIMBER CONNECTOR

Real environment

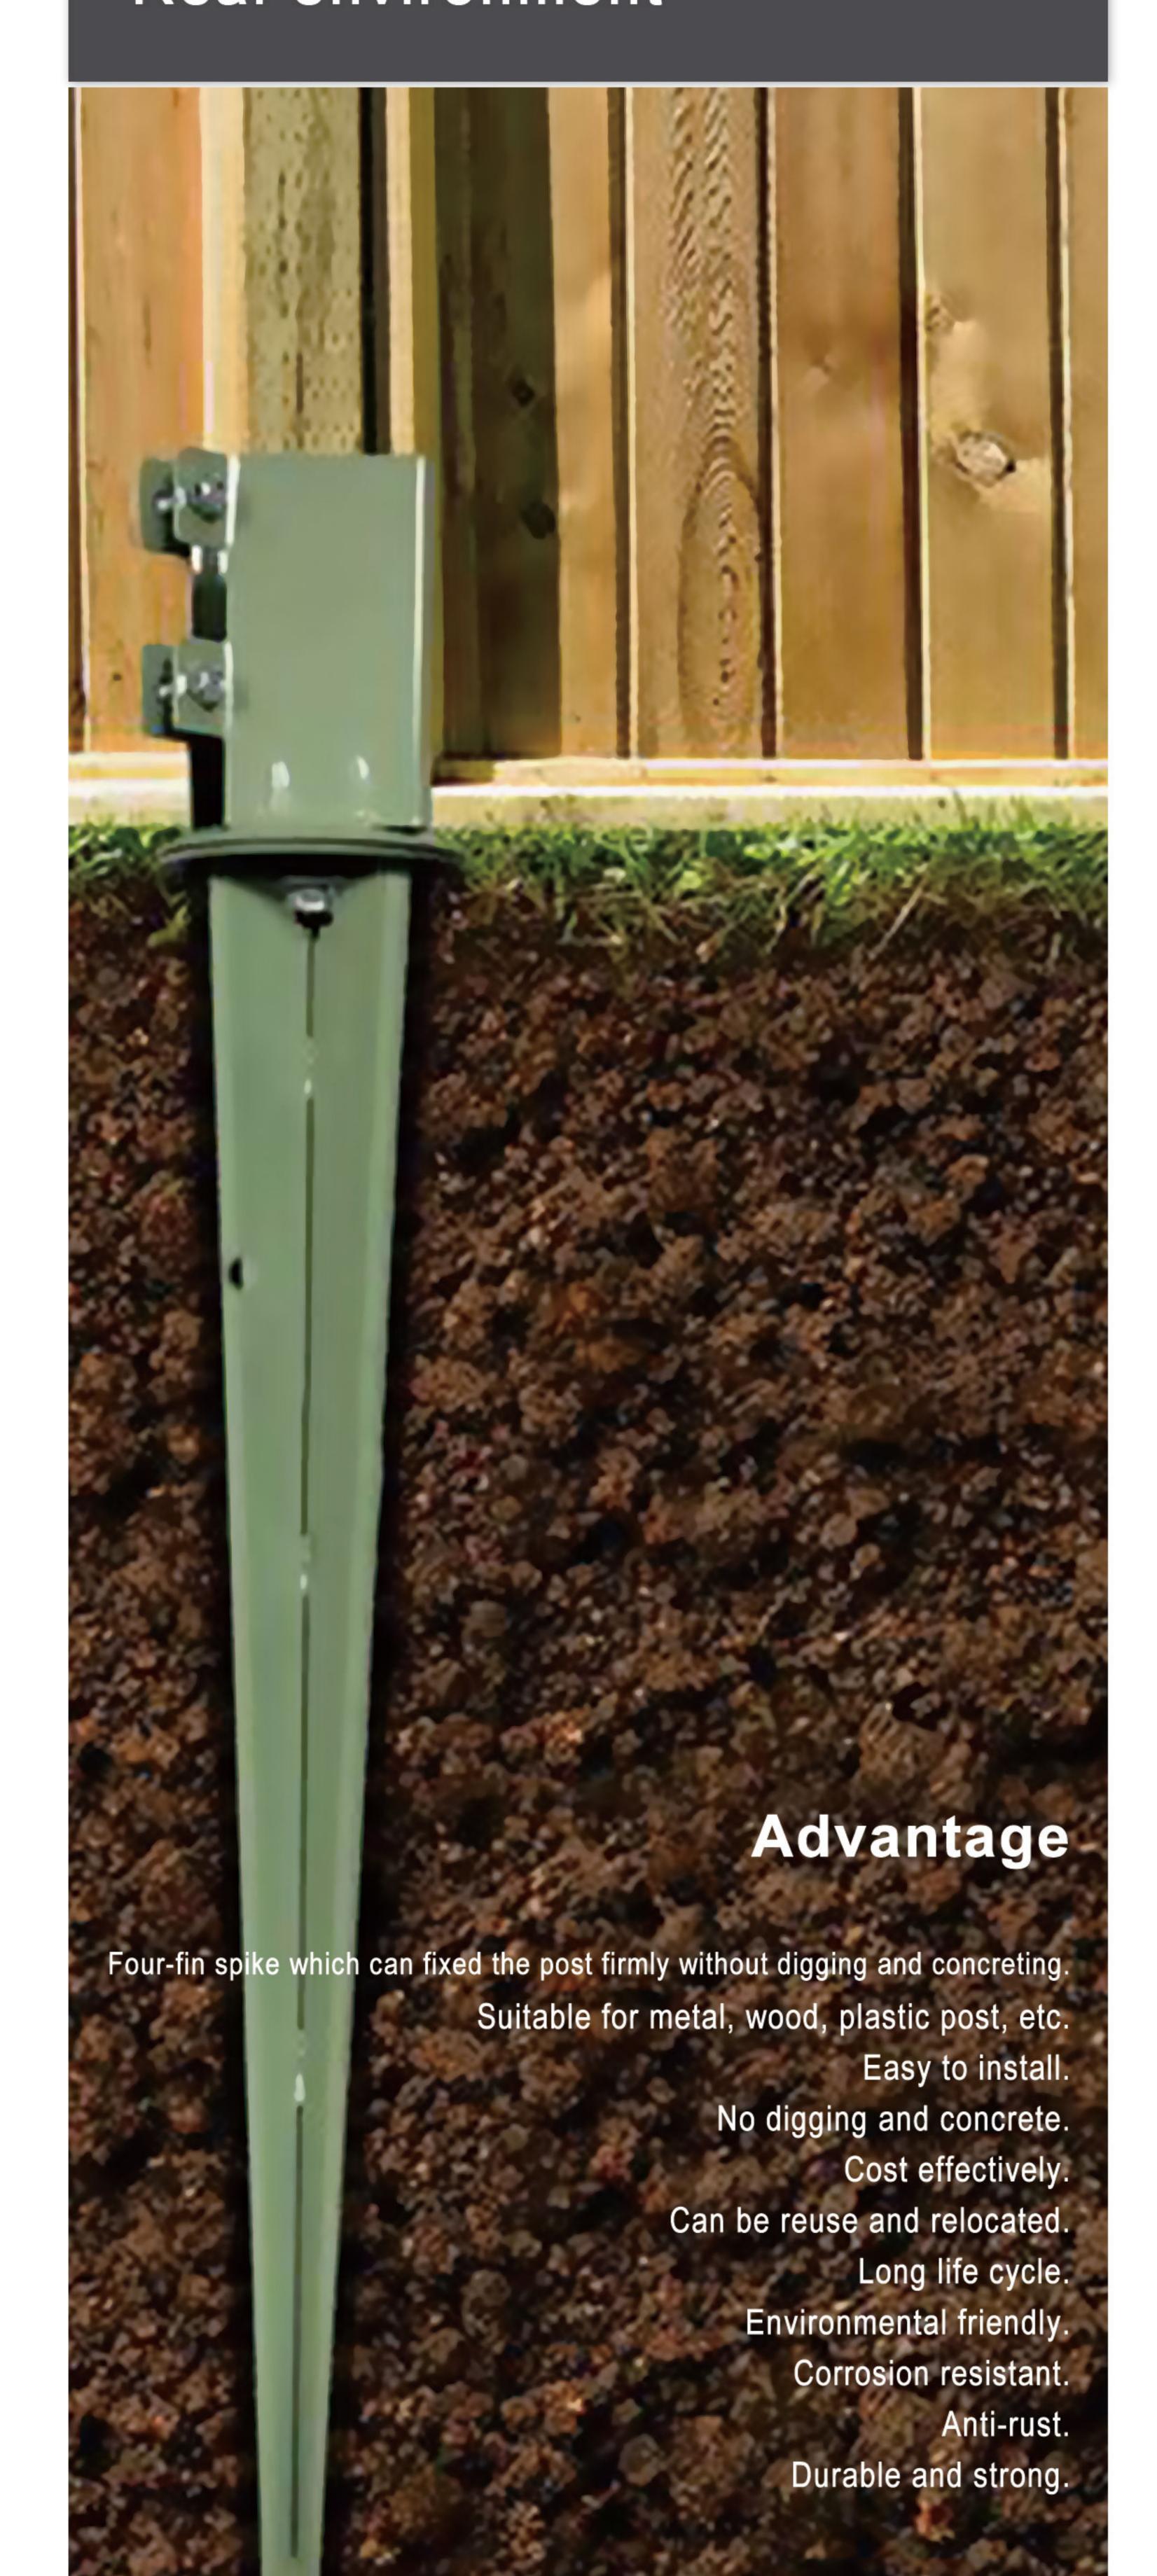





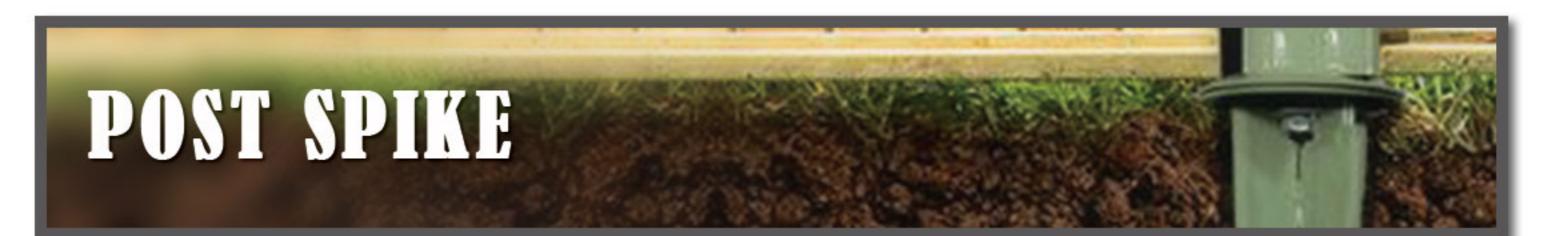

Length (mm) 600 / 750 / 900

Width (mm) 45 / 50 / 60 / 70 / 90 / 100 / 120

Thickness (mm) 1.8 / 2

Surface HDG / PC



### POST SUPPORT

#### Real environment

#### Advantage

Comply with building code requirements. Long term of providing protection.

Enhance the stability of the post.

Perfect for timber post.

Anti-rust.

No need of digging and concreting.

Can be used in humid environments.















# T POST SUPPORT

Length (mm)	50-150
Width (mm)	50-130
Height (mm)	100-300
Thickness (mm)	3-6
Pin Dia. (mm)	4-10
Surface	HDG / SS

Custom sizes and shapes are available





# H POST SUPPORT

Length (mm)	600 / 750 / 800
Width (mm)	71 / 81 / 91 / 101 / 111 / 116 / 121 / 141
Height (mm)	50 / 60 / 80
Thickness (mm)	5 / 6 / 8
Surface	HDG / SS

Custom sizes and shapes are available



# U POST SUPPORT

Height (Qmm)	100-300
Length (mm)	50-150
Width (mm)	50-130
Thickness (mm)	3-6
Pin Dia. (mm)	4-10
Surface	HDG / SS

Custom sizes and shapes are available



# L POST SUPPORT

Length (mm)	60-150
Width (mm)	50-90
Height (mm)	100-140
Thickness (mm)	3-6
Pin Dia. (mm)	4-6
Surface	HDG / SS

Custom sizes and shapes are a



### POST SUPPORT

#### Real environment

#### Advantage

Comply with building code requirements. Long term of providing protection. Enhance the stability of the post. Perfect for timber post.

Anti-rust.

No need of digging and concreting. Can be used in humid environments.





HDG / EG / SS

# U POST SUPPORT

Height (Qmm)	100-160
Length (mm)	60-150
Width (mm)	50-130
Thickness (mm)	3-6
Surface	HDG / SS

#### Custom sizes and shapes are available



# BOLT DOWN POST SUPPORT

Height (Qmm)	80-120
Width (mm)	90-125
Thickness (mm)	1.5-4.0
Surface	HDG / SS

#### Custom sizes and shapes are available




# ADJUSTABLE POST SUPPORT

Opening (mm)	65-120
Bar length (mm)	250
Bar dia. (mm)	16-20


#### Custom sizes and shapes are available

Surface

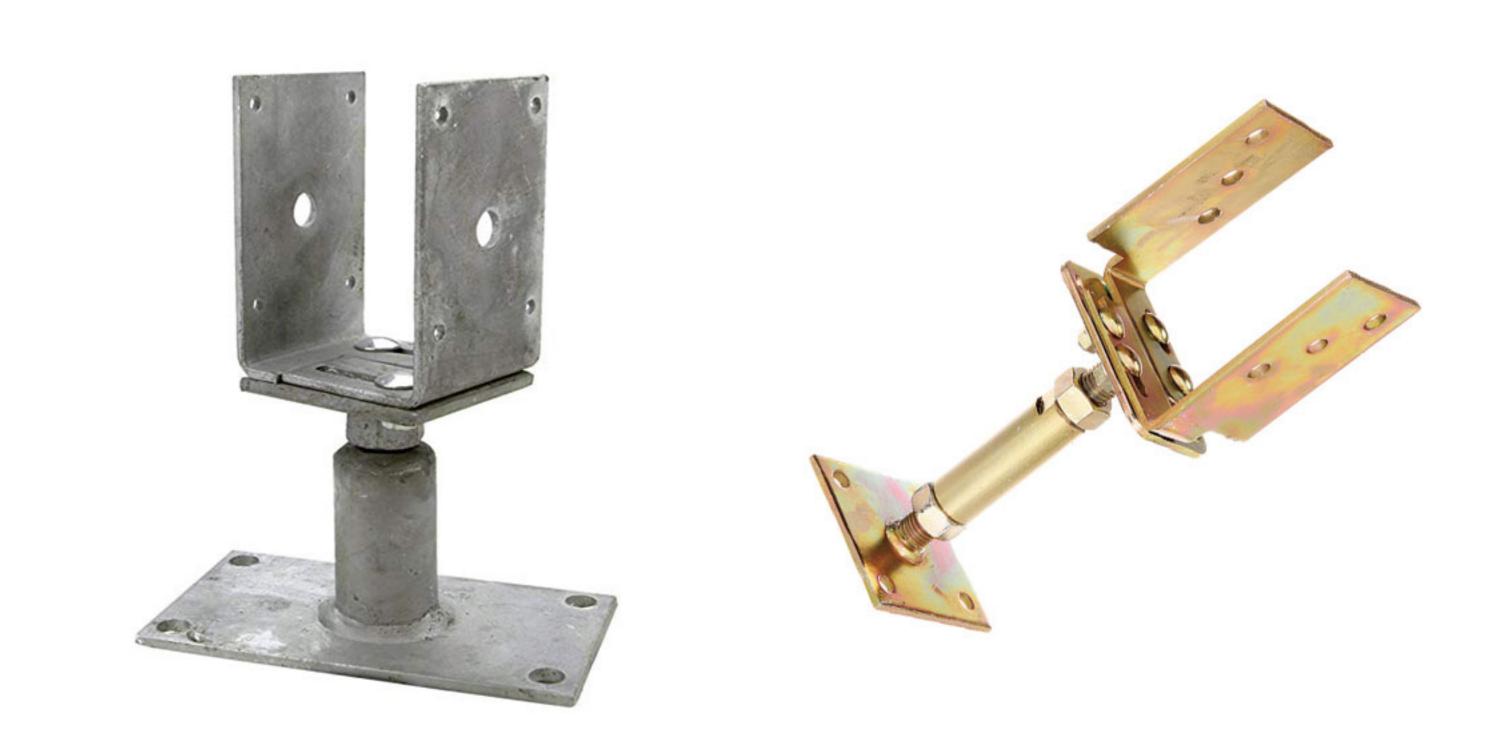



Height (mm)	300-500
Width (mm)	50-70
Pin Dia. (mm)	12-30
Surface	HDG / EG

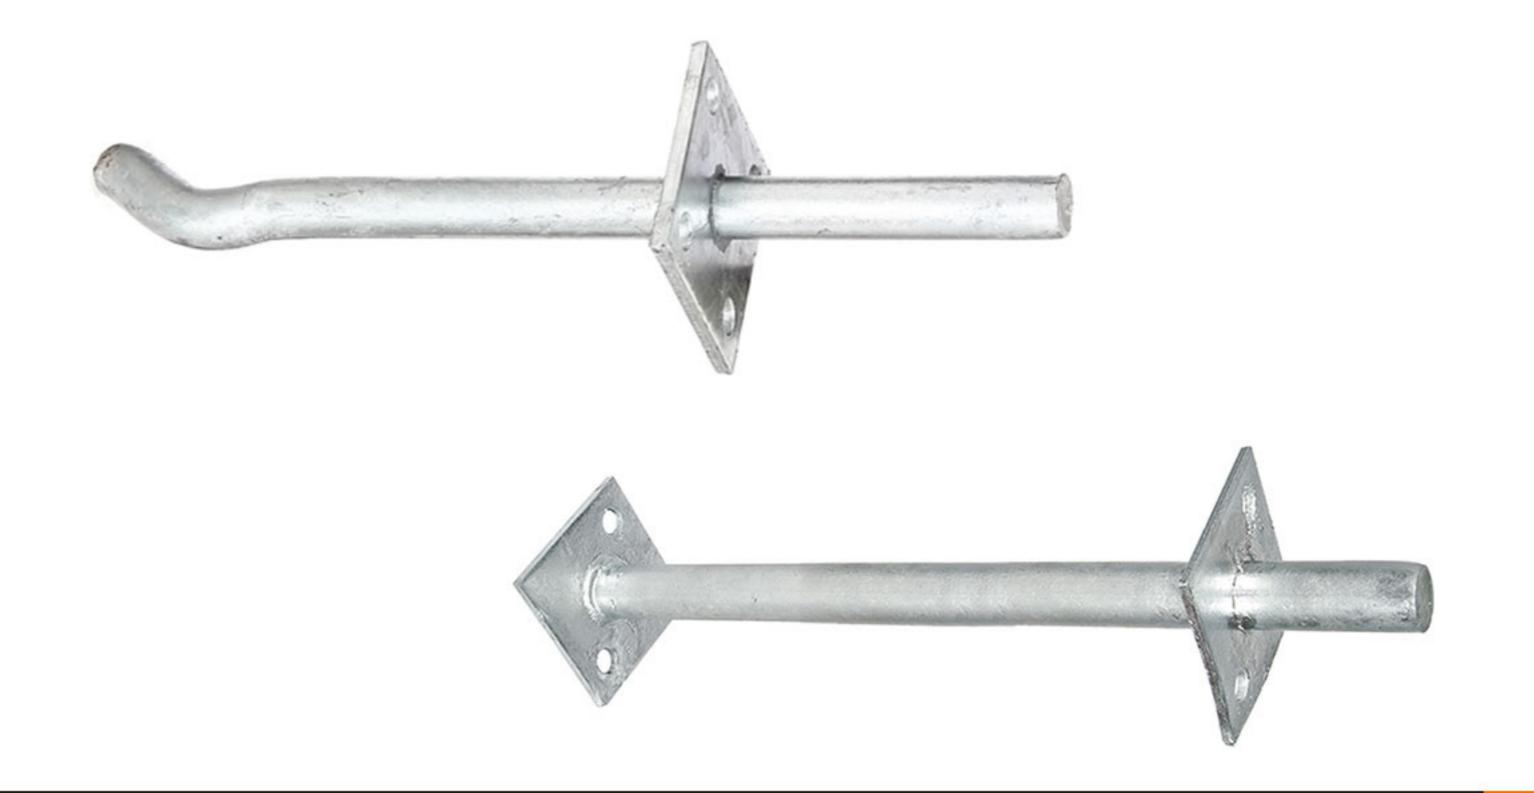




### Advantage

Convenient and fully adjustable for many post size.



Height (mm)	100-300
Length or diameter (mm)	50-150
Plate length (mm)	70-300
Thickness (mm)	3-6
Surface	HDG / PC

Custom sizes and shapes are available

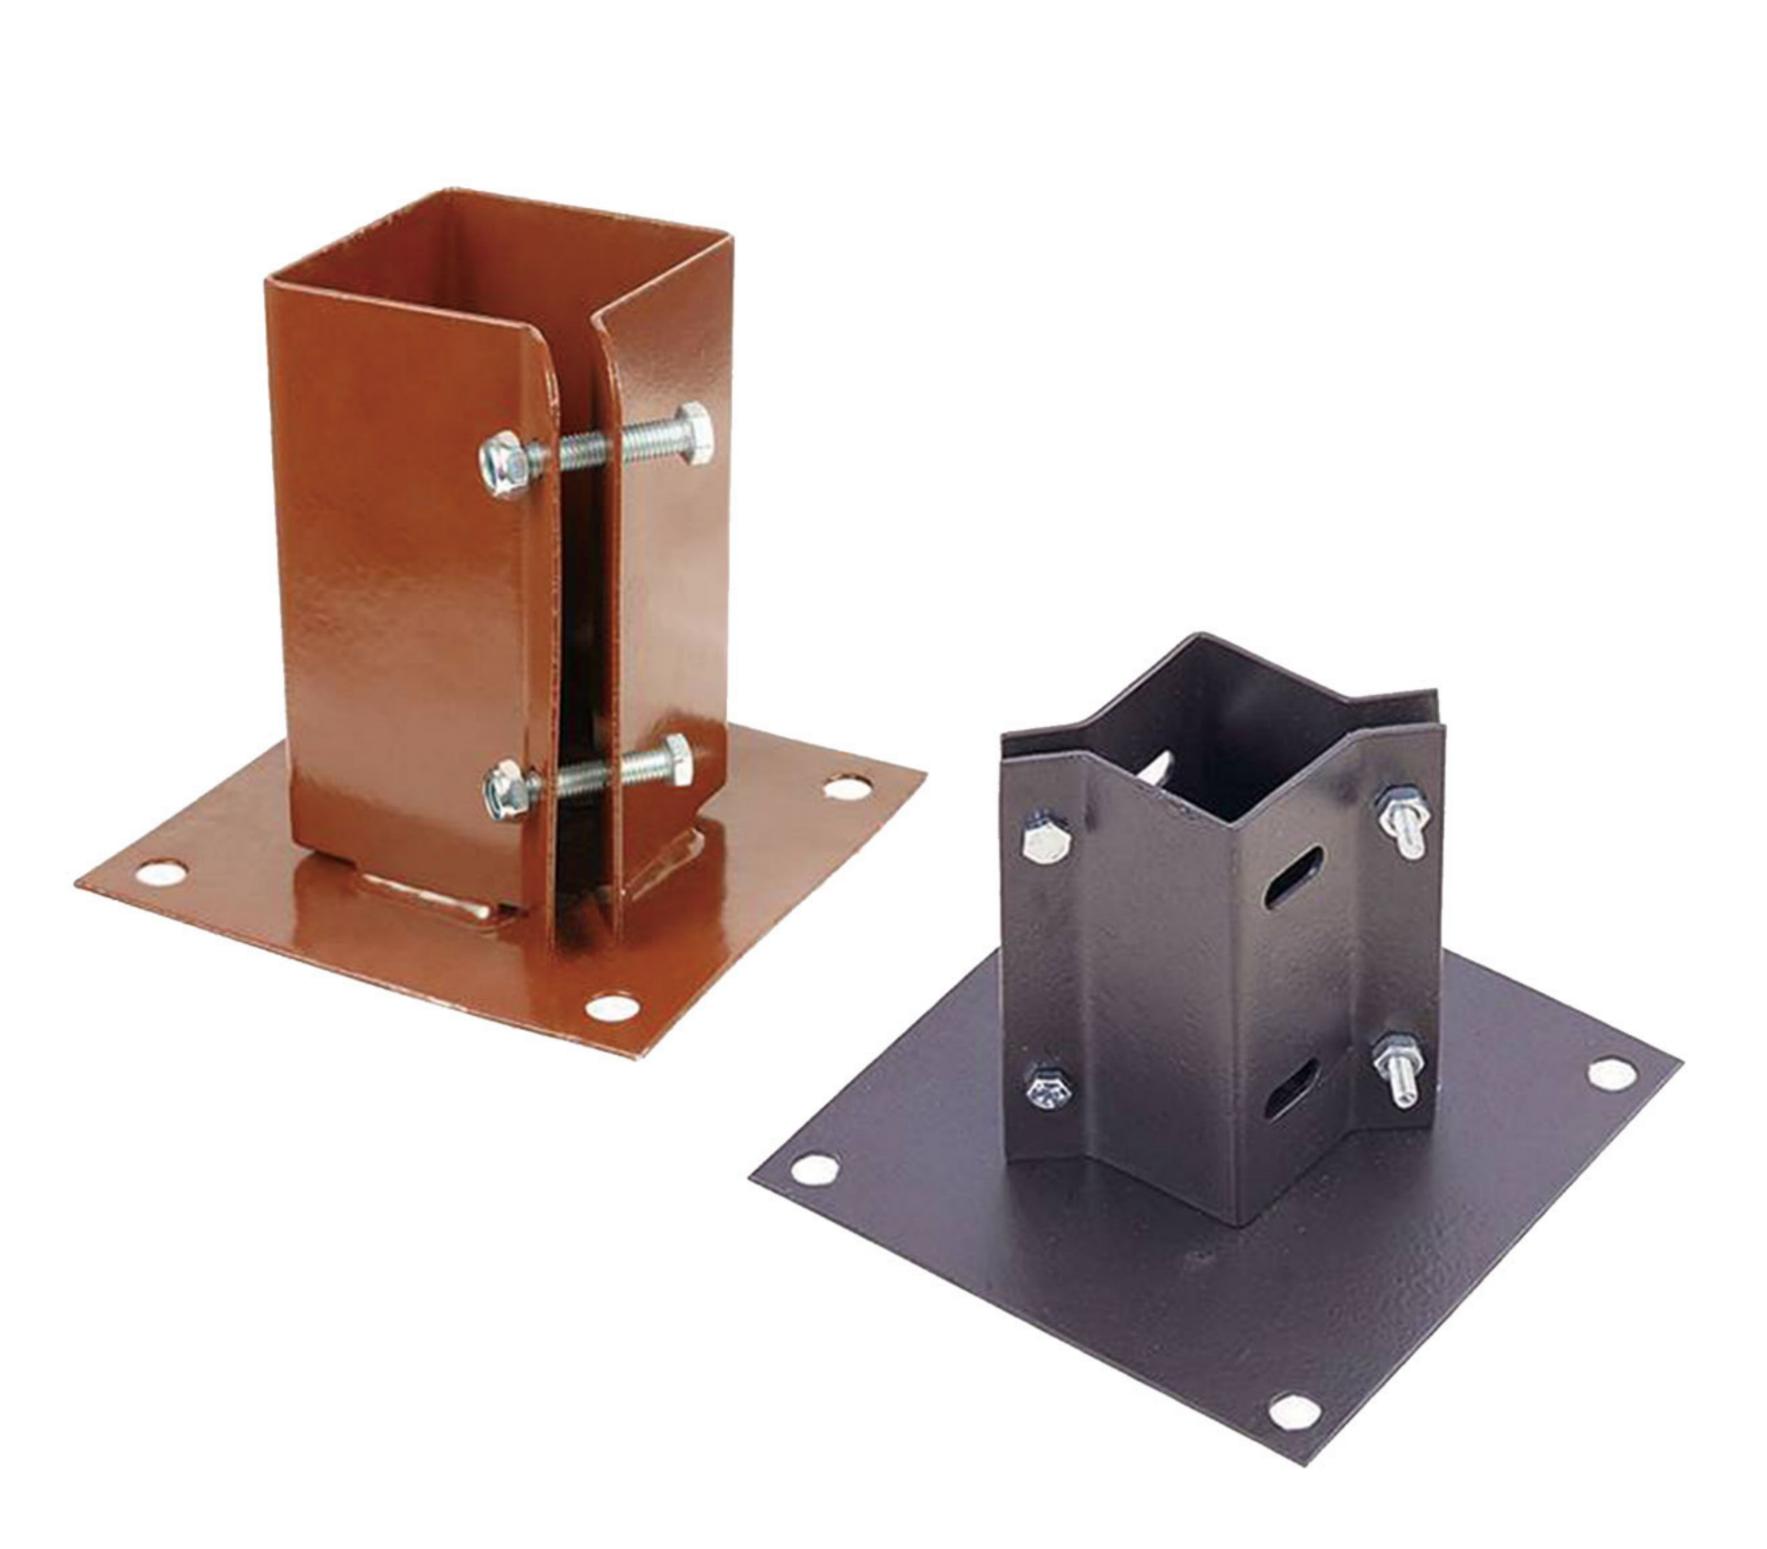





#### Advantage

Best corrosion & rust resistance Easy to install & remove Lightweight but high strength




Height (mm)	100-300
Length or diameter (mm)	50-150
Plate length (mm)	70-300
Thickness (mm)	1.8-5
Surface	HDG / PC



## FOUNDATION

Real environment

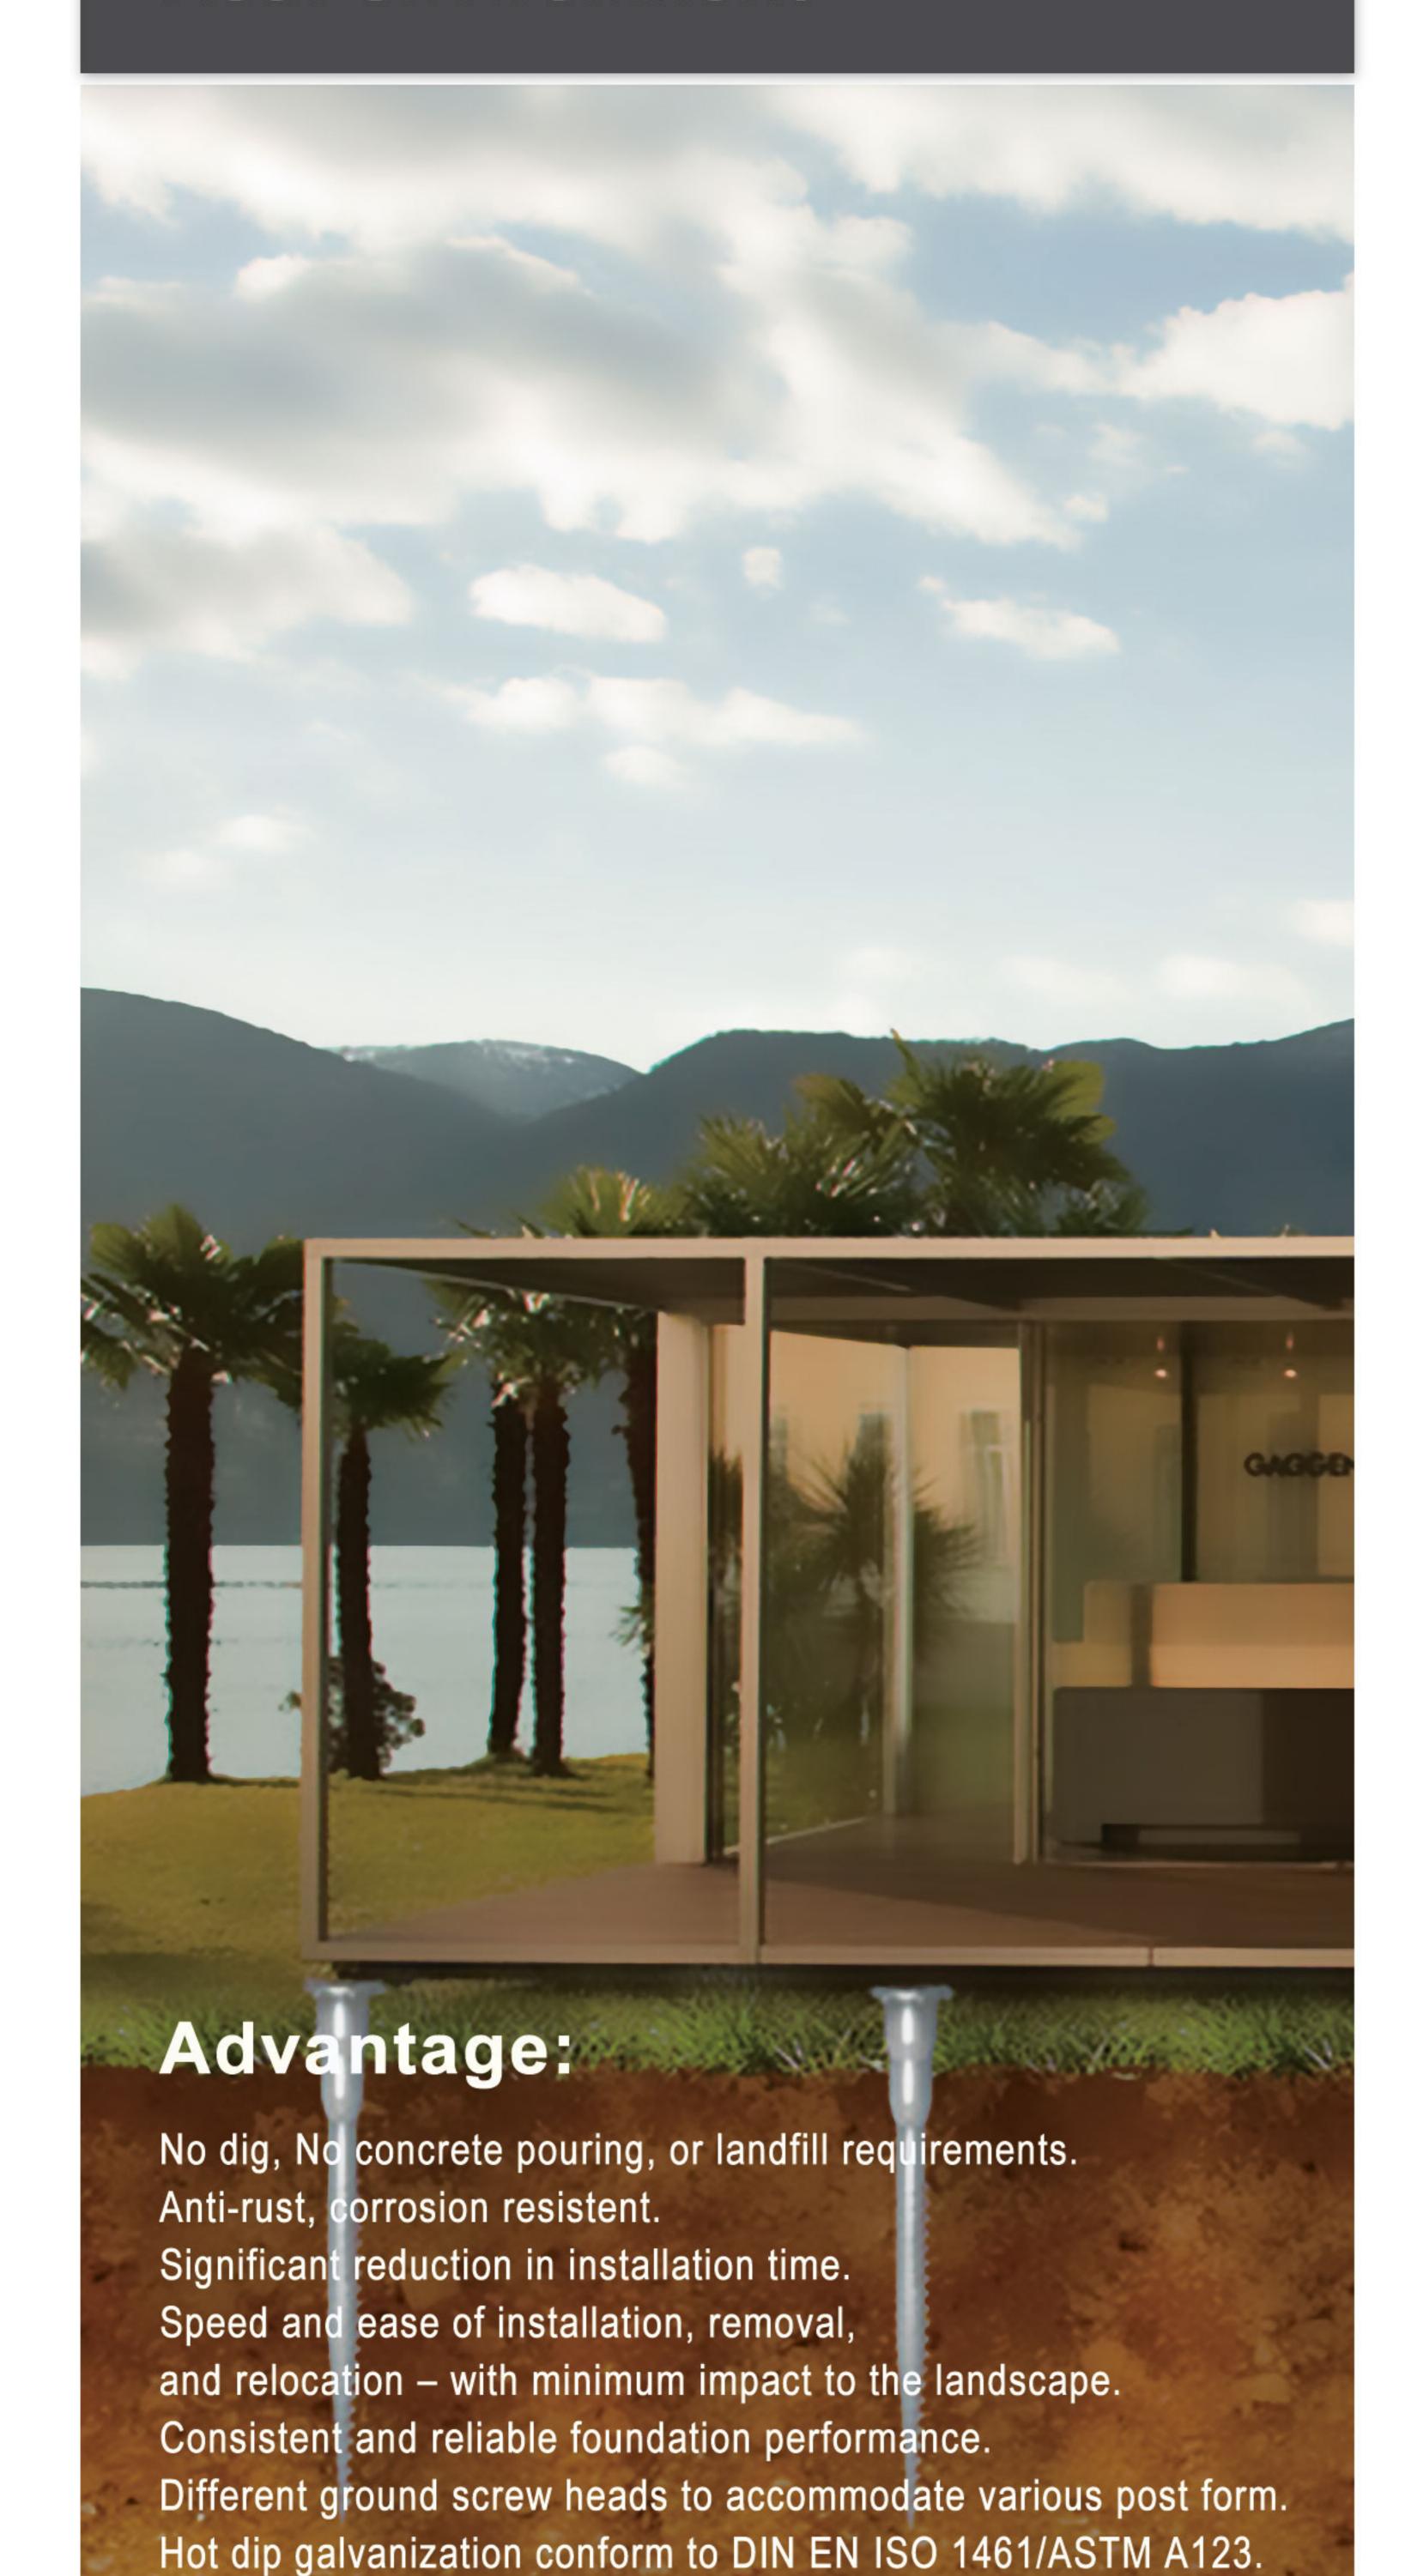

### Application:

OEM service available.

Cost effectively.

Fence, barrier, solar system, shelter, shed, traffic sign, tent, timber construction, ads board, flage pole and etc



# GROUND SCREW

OD(mm) 60 / 68


Length(mm) 550 / 570 / 580

Pipe thickness(mm) 1.5-2

Holes 3 X dia.16mm



OD(mm) 68
Length(mm) 560
Pipe thickness(mm) 1.5-2
Holes 3 X dia.16mm

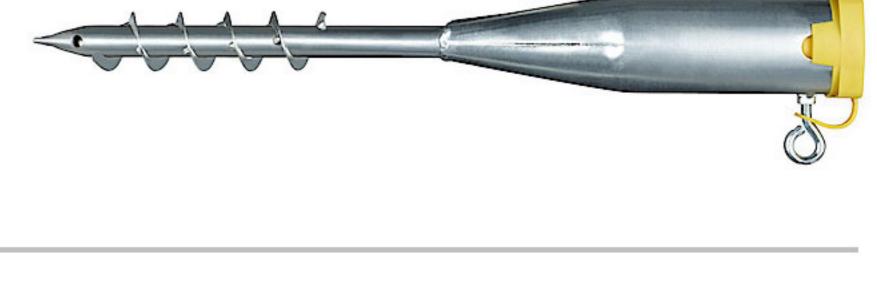

OD(mm)

Length(mm)

Pipe thickness(mm)

1.5-2

Holes

#### Pipe Part OD(mm) 67 Length(mm) 555 / 565 / 735 / 870 Holes 10 X dia. 13 **U** Part 130 / 170 Height(mm) 71 / 91 / 110 Width(mm) **70mm** Length(mm) 10 X dia. 11 Holes

## FOUNDATION

Real environment





## GROUND SCREW WITH FLANGE

OD(mm)

Length(mm)

1200 / 1600 / 1800 / 2000

Pipe thickness(mm)

3-4

Holes

Flange

DIY

SCREW PILE


OD(mm) 76 / 89 / 114


Length(mm) 1200 / 1600 / 1800 / 2000

Pipe thickness(mm) 3-4

Holes 4 X dia.16mm

Flange

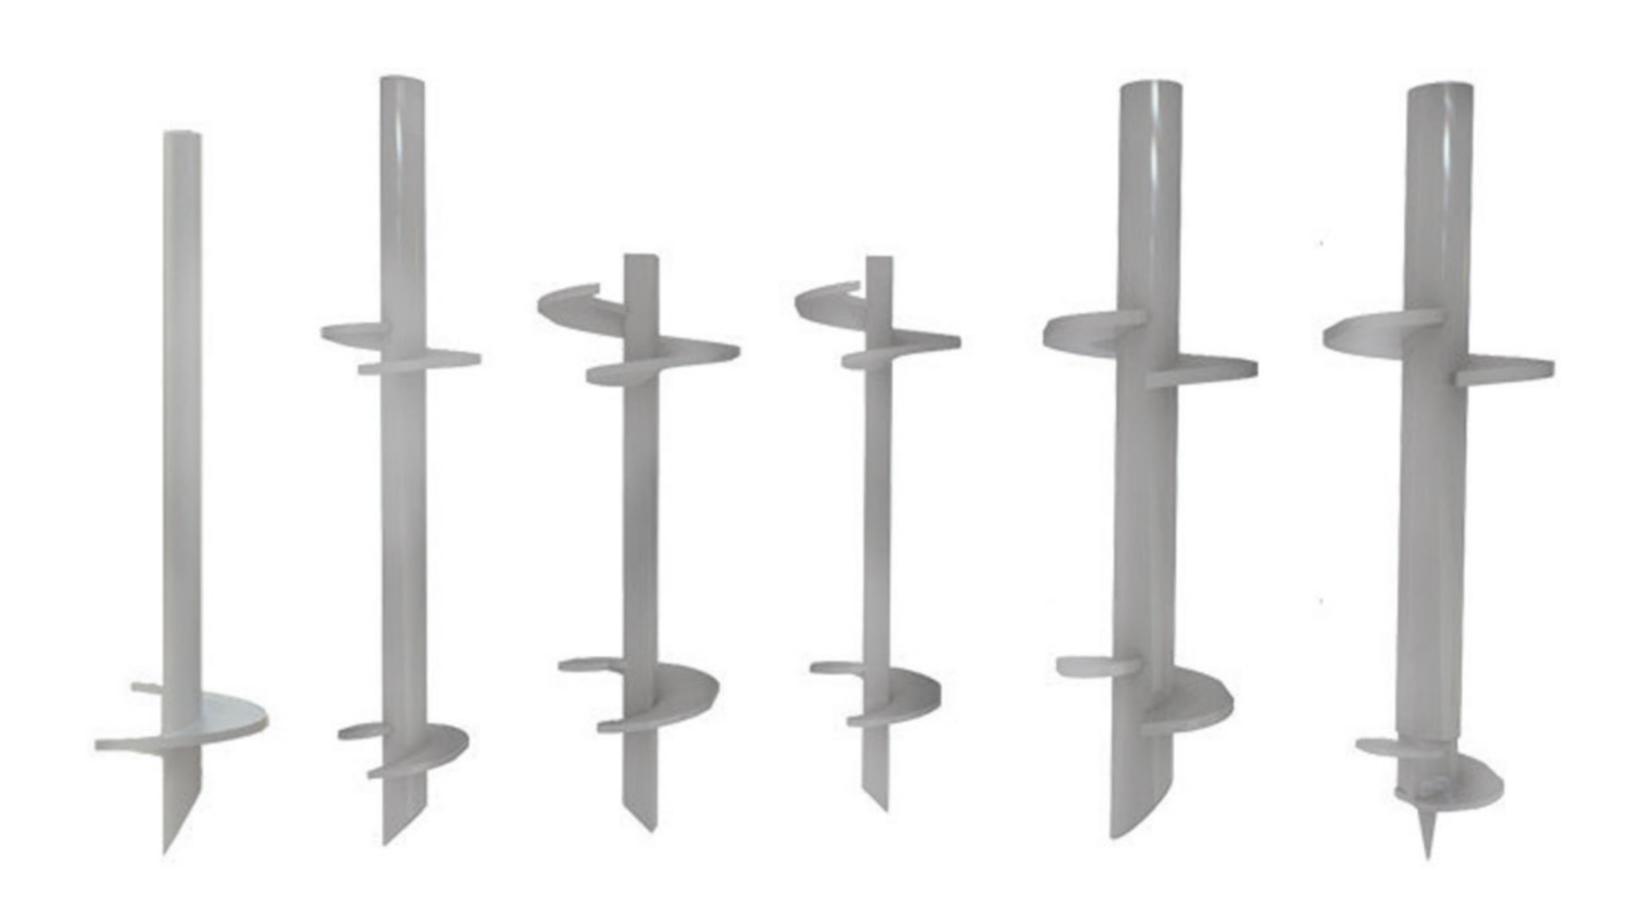

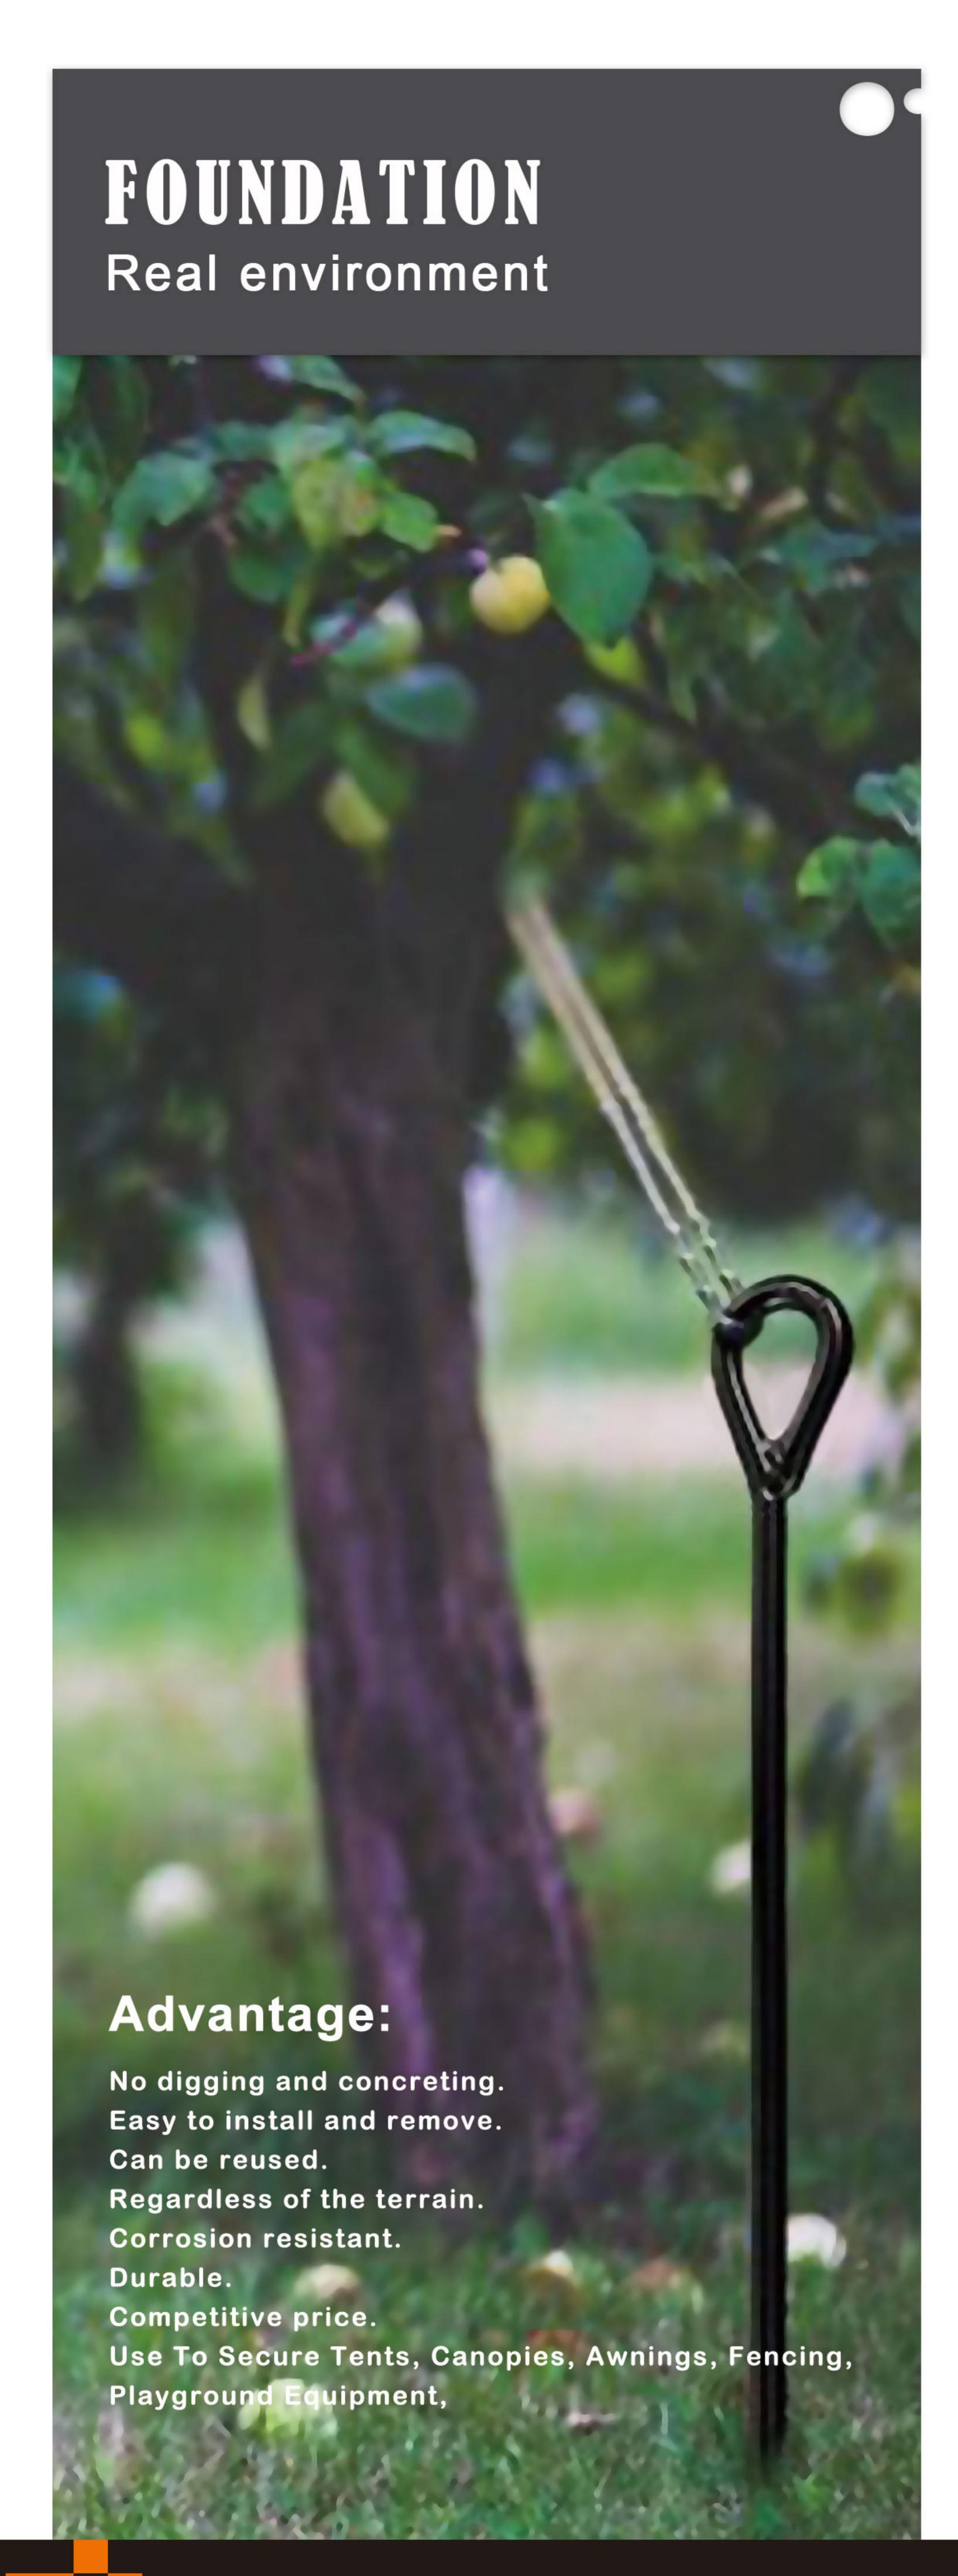



# GROUND ANCHOR

Length (mm)	800-1800
Helix dia. (mm)	500-1400
Helix thickness (mm)	10-16
Shaft dia. (mm)	2-5
Surface	HDG / PP





### FARM SUPPLY

Real environment


### Description:

It is fabricated with welded hot dip galvanized pipes for



# LIVESTOCK PAREL


Width (mm) 1200-4800 1100-2200 Height (mm) Wire Dia. (mm) 3.5 / 4.0 /5.0 Weld Mesh (mm) 100 x 200 32 / 33.4 Pipe (mm) HDG / PC

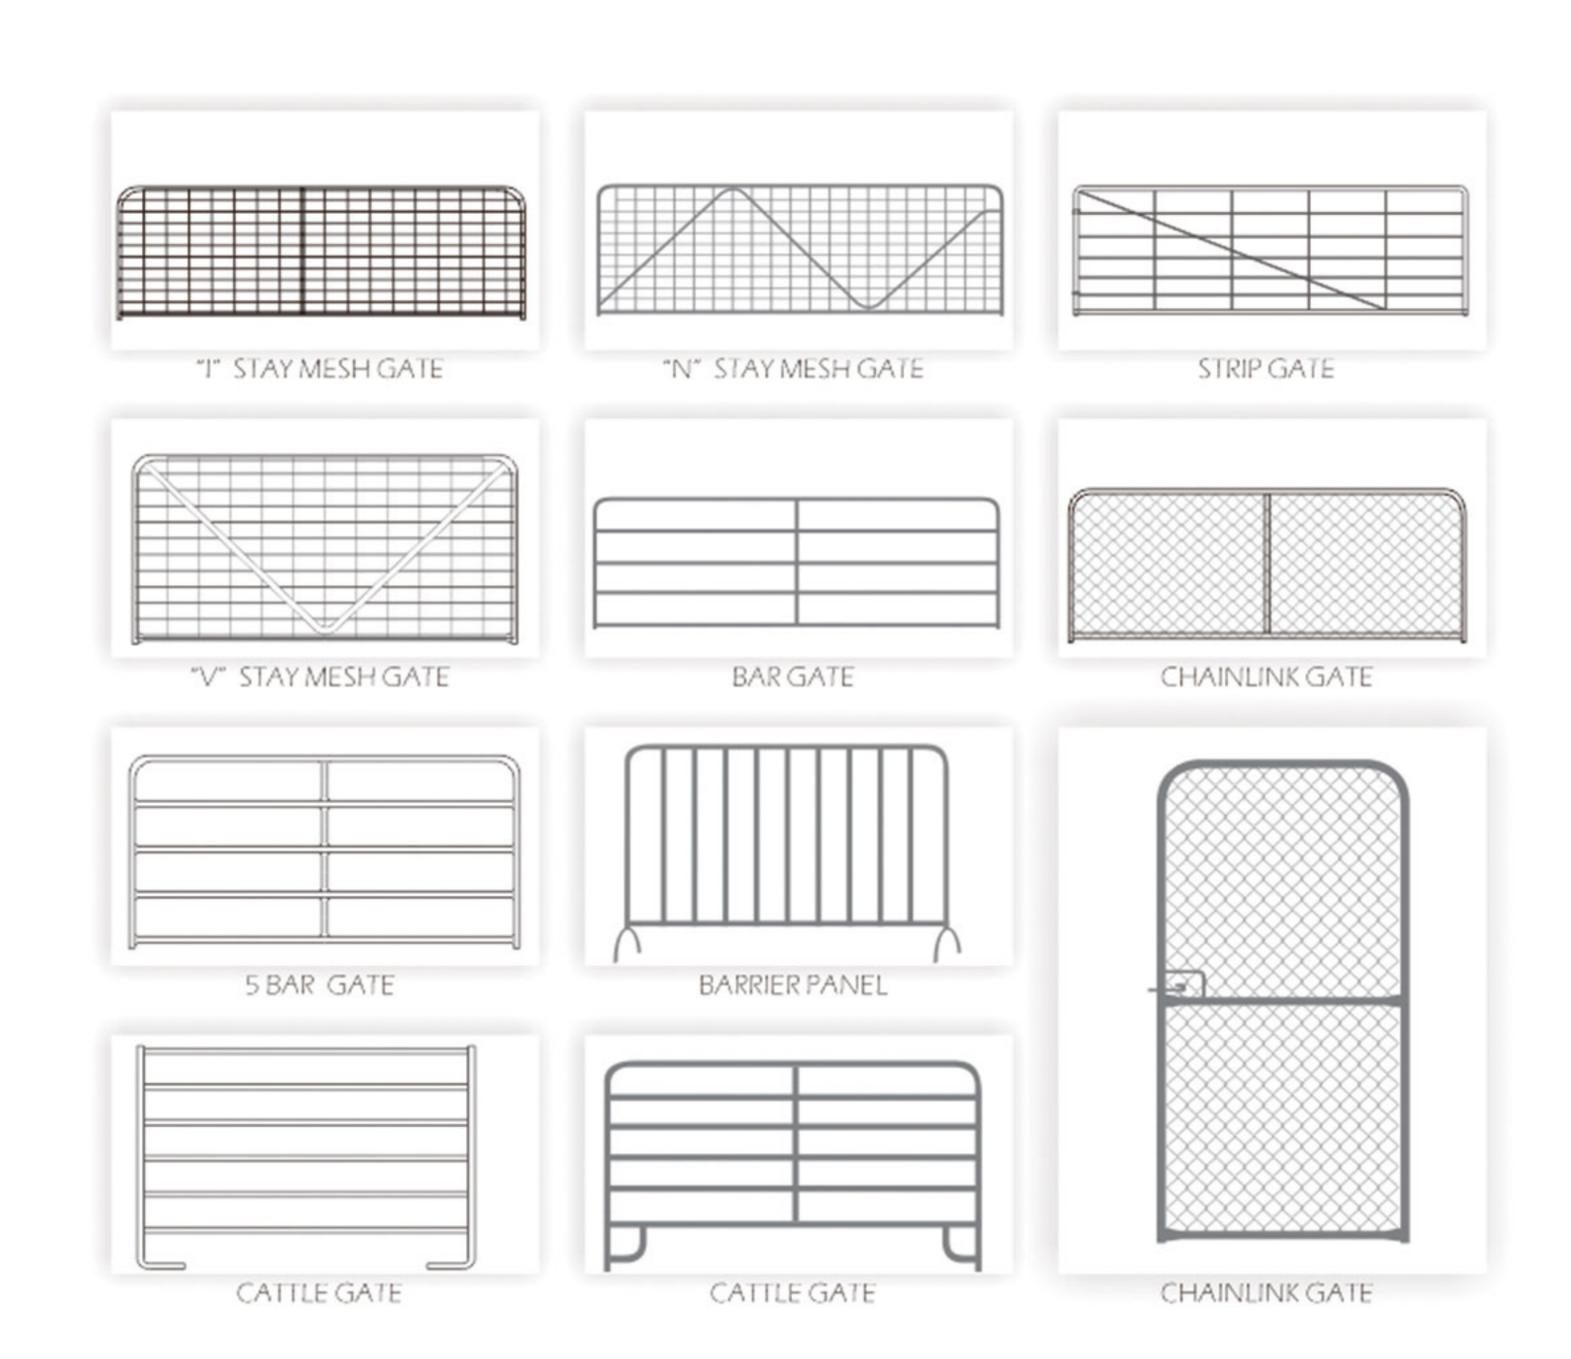


## Pipe shape option

Surface



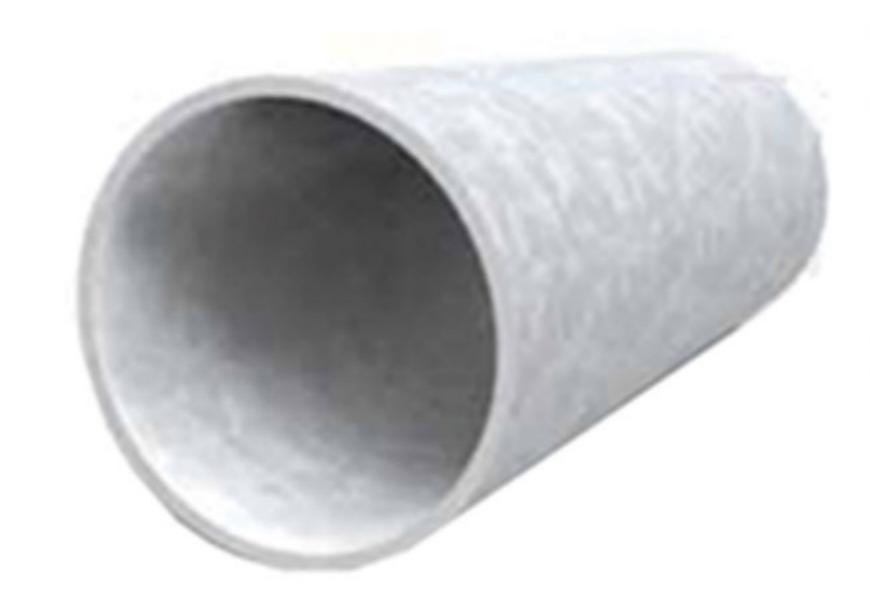

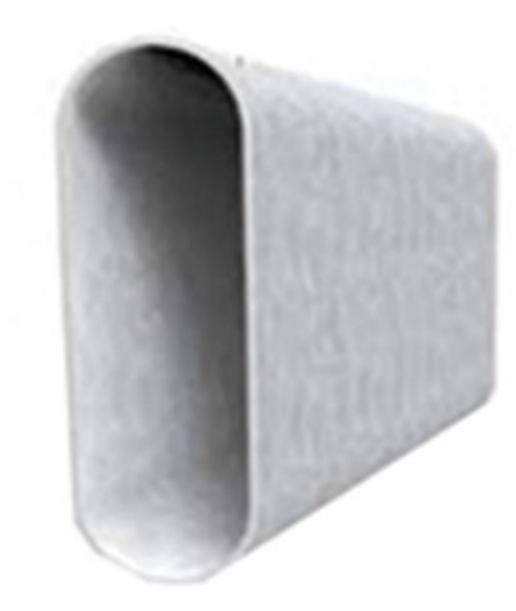

### POST CAP

Real environment



### Advantage:

No welding necessary - cap fits tight Easy to install

Durable and weather resistant

Help to complete the look of any railing or exterior fence

All caps can be placed on metal and wooden railings





### SQUARE POST CAP

Size (mm)

71 / 91 / 101 / 111 / 116 / 121


Thickness (mm)

0.8 / 1.0

Surface

HDG / SS / AL

Custom sizes and shapes are available

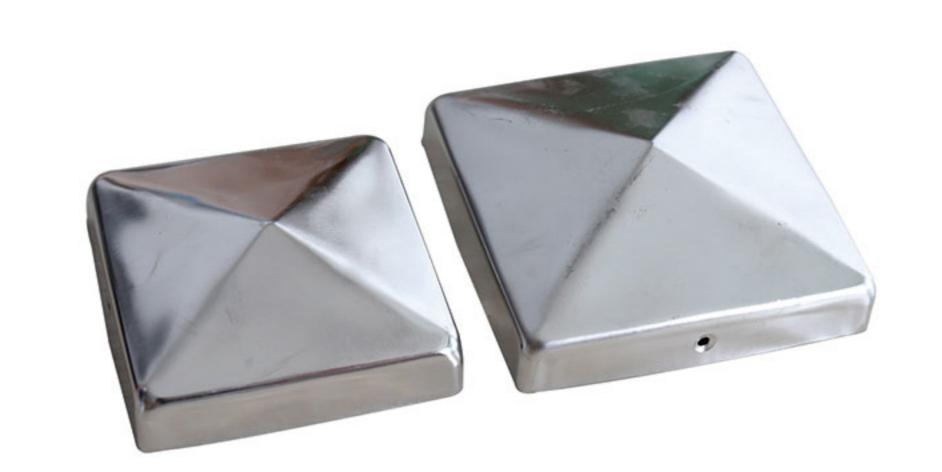



# ROUND POST CAT

Size (mm)

60 / 80 / 100

Thickness (mm)

0.8 / 1.0

Surface

HDG / SS / AL


Custom sizes and shapes are available







#### **Related Products**

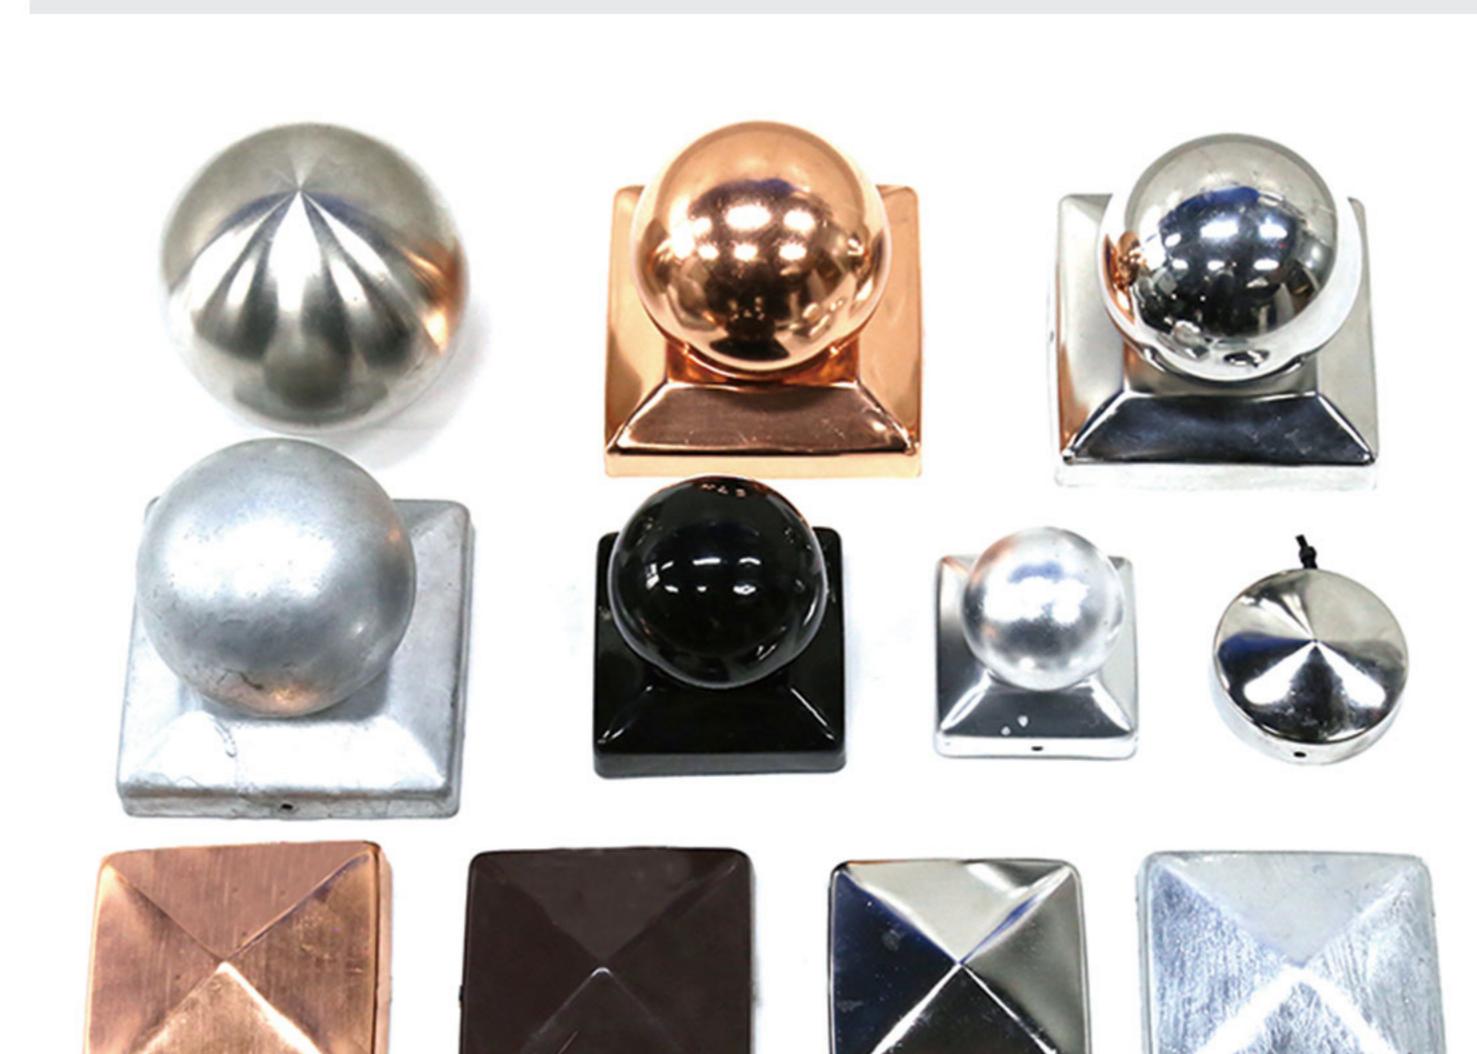

## BBQ MESH

Real environment









Size (mm) 500-1200

Wire (mm) 2-6

Shape Round, Square, Rectangle

Surface

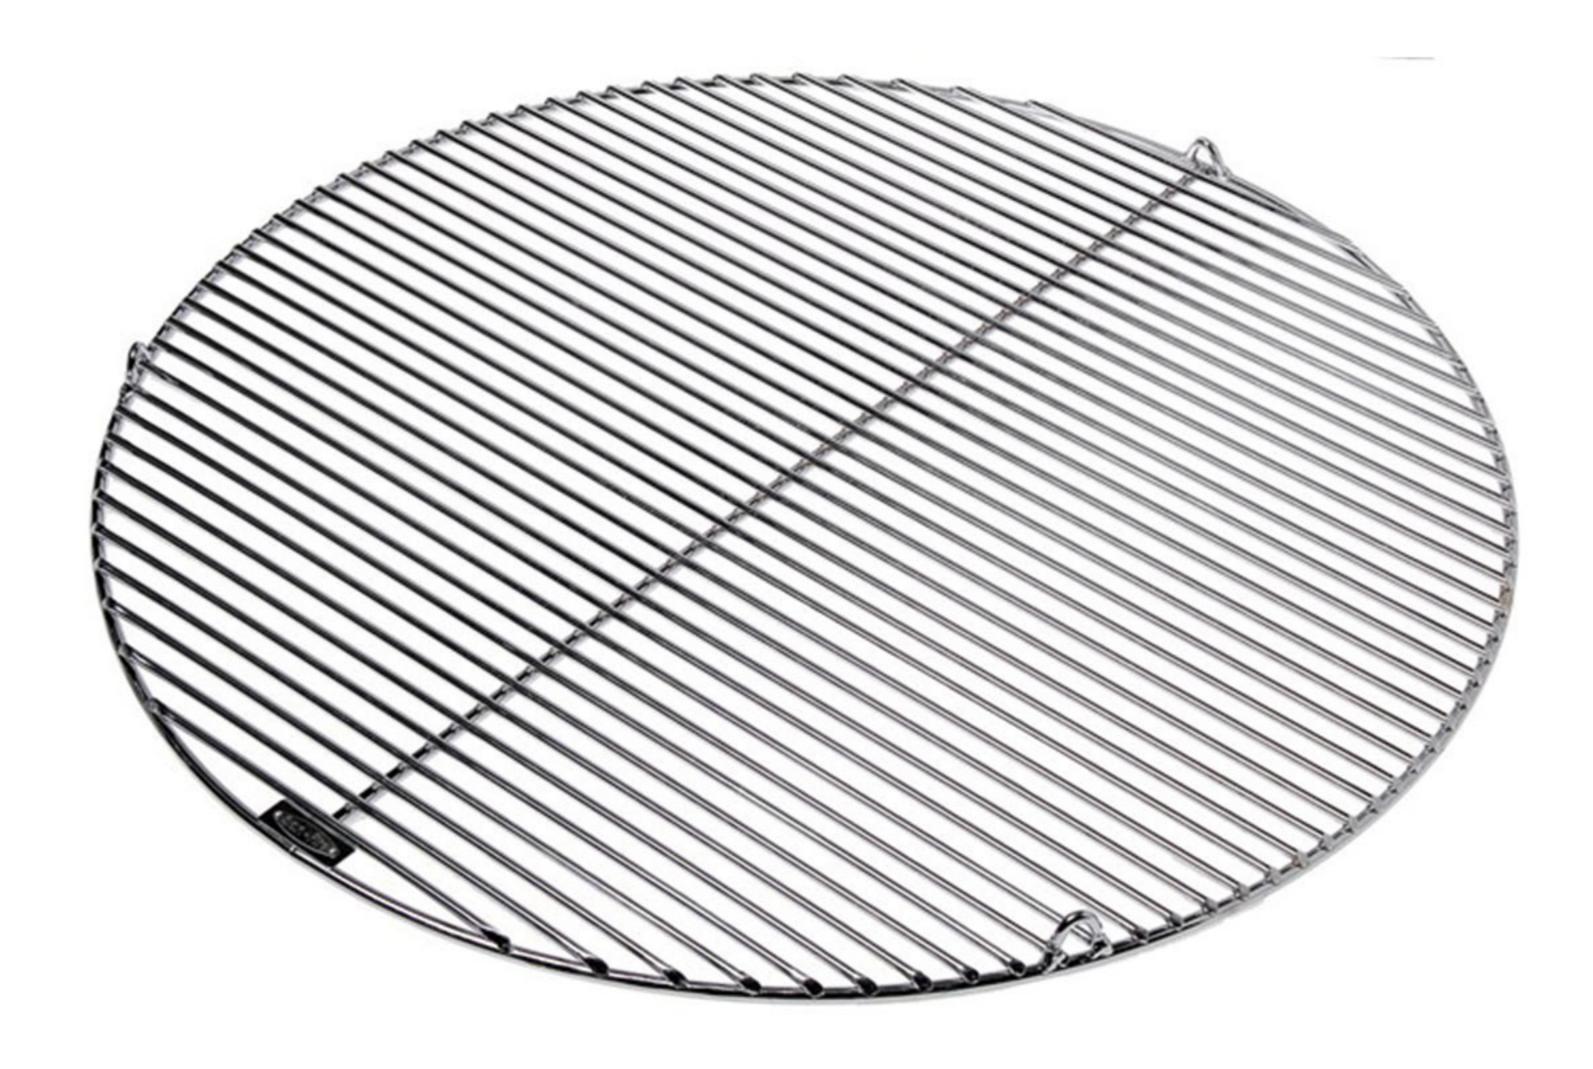

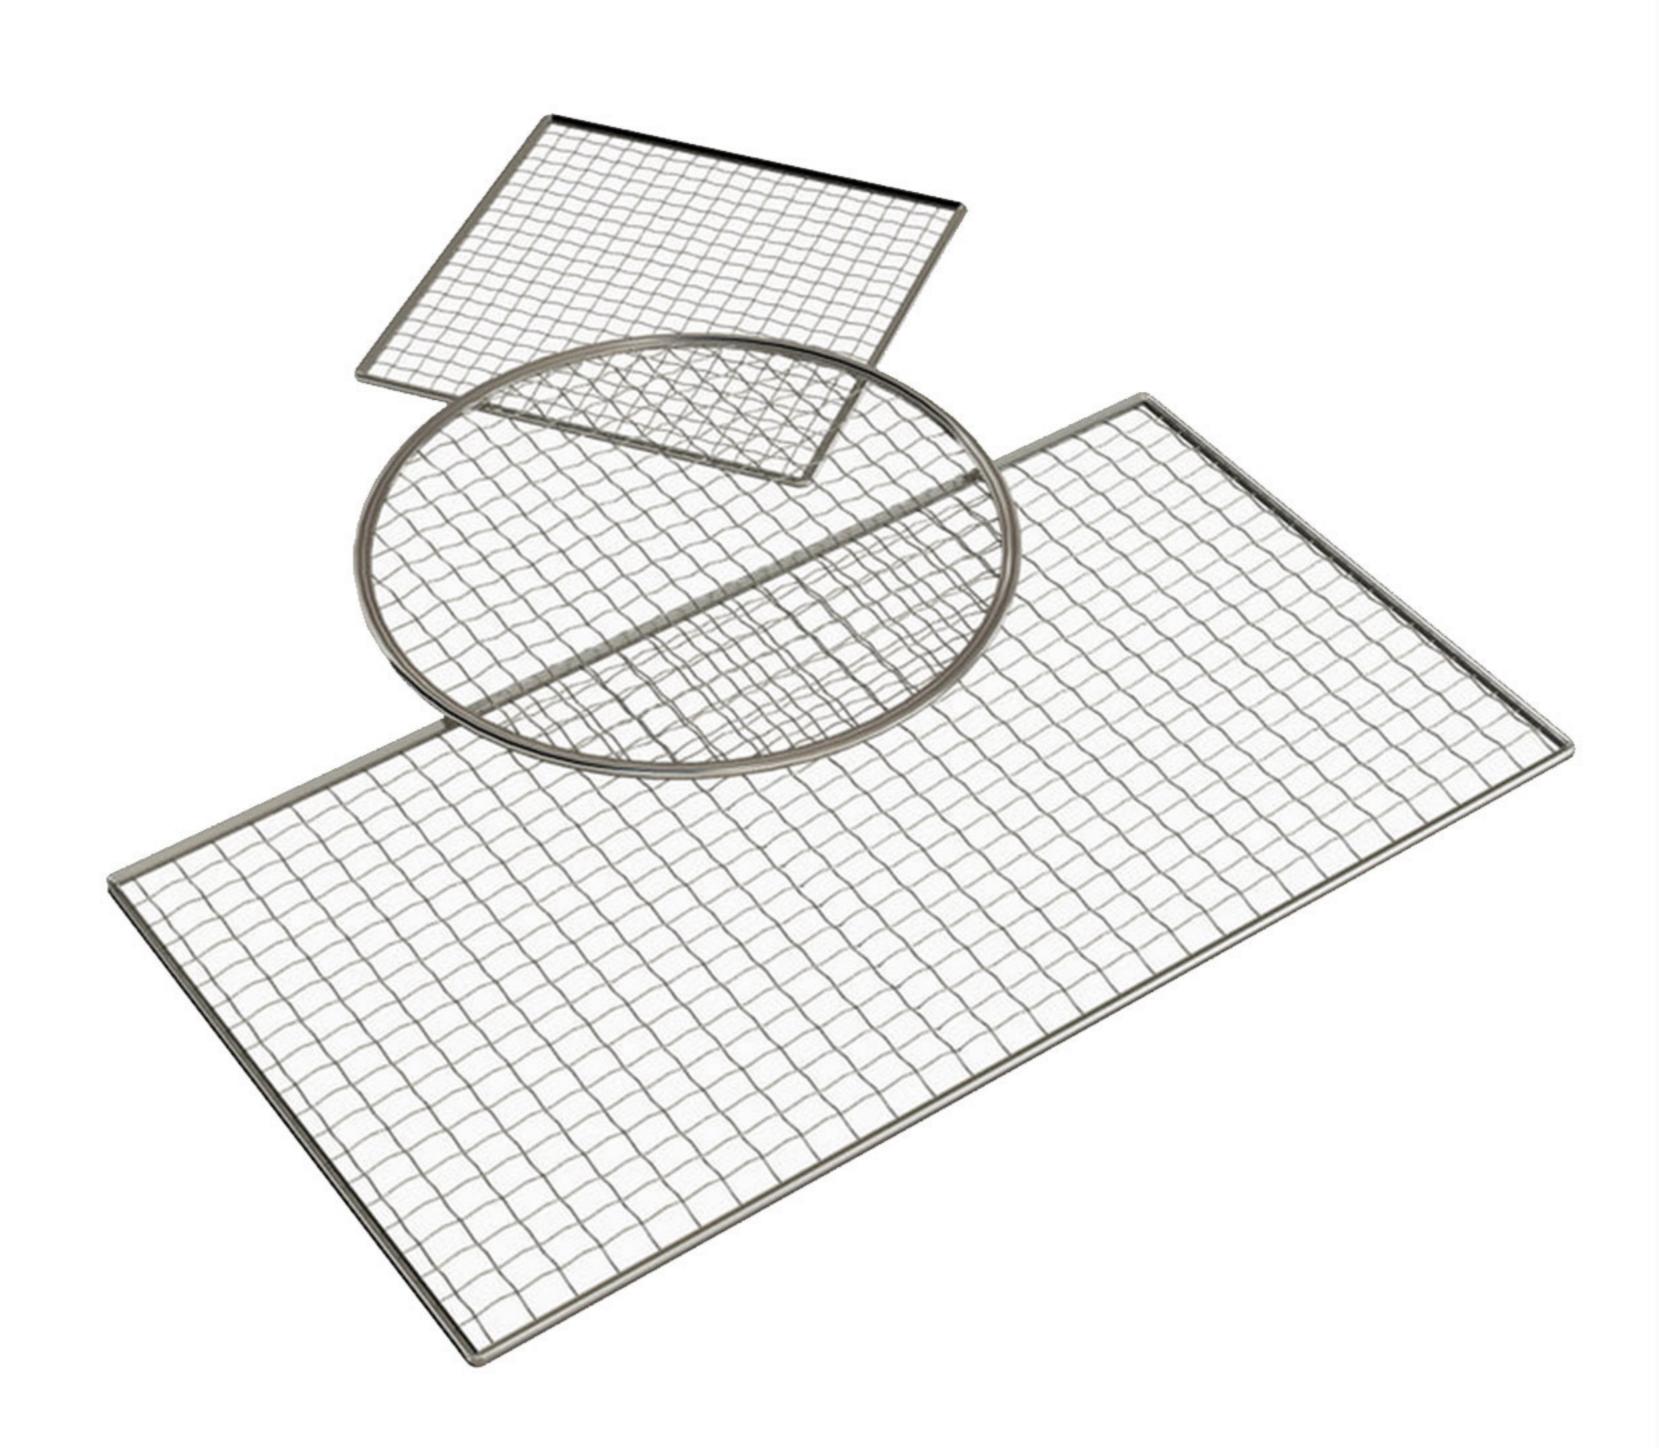

### WIRE STRAINER

Real environment


#### Description:

An in-line wire strainer allows you to keep up to 4,000 feet of high tensile wire tight by allowing you to re-tension the wire whenever it is required.

You need at least one wire strainer per fence wire, more strainers depending upon length of the wire.

Once installed you simply tighten the in-line wire strainer using a

ratchet handle.

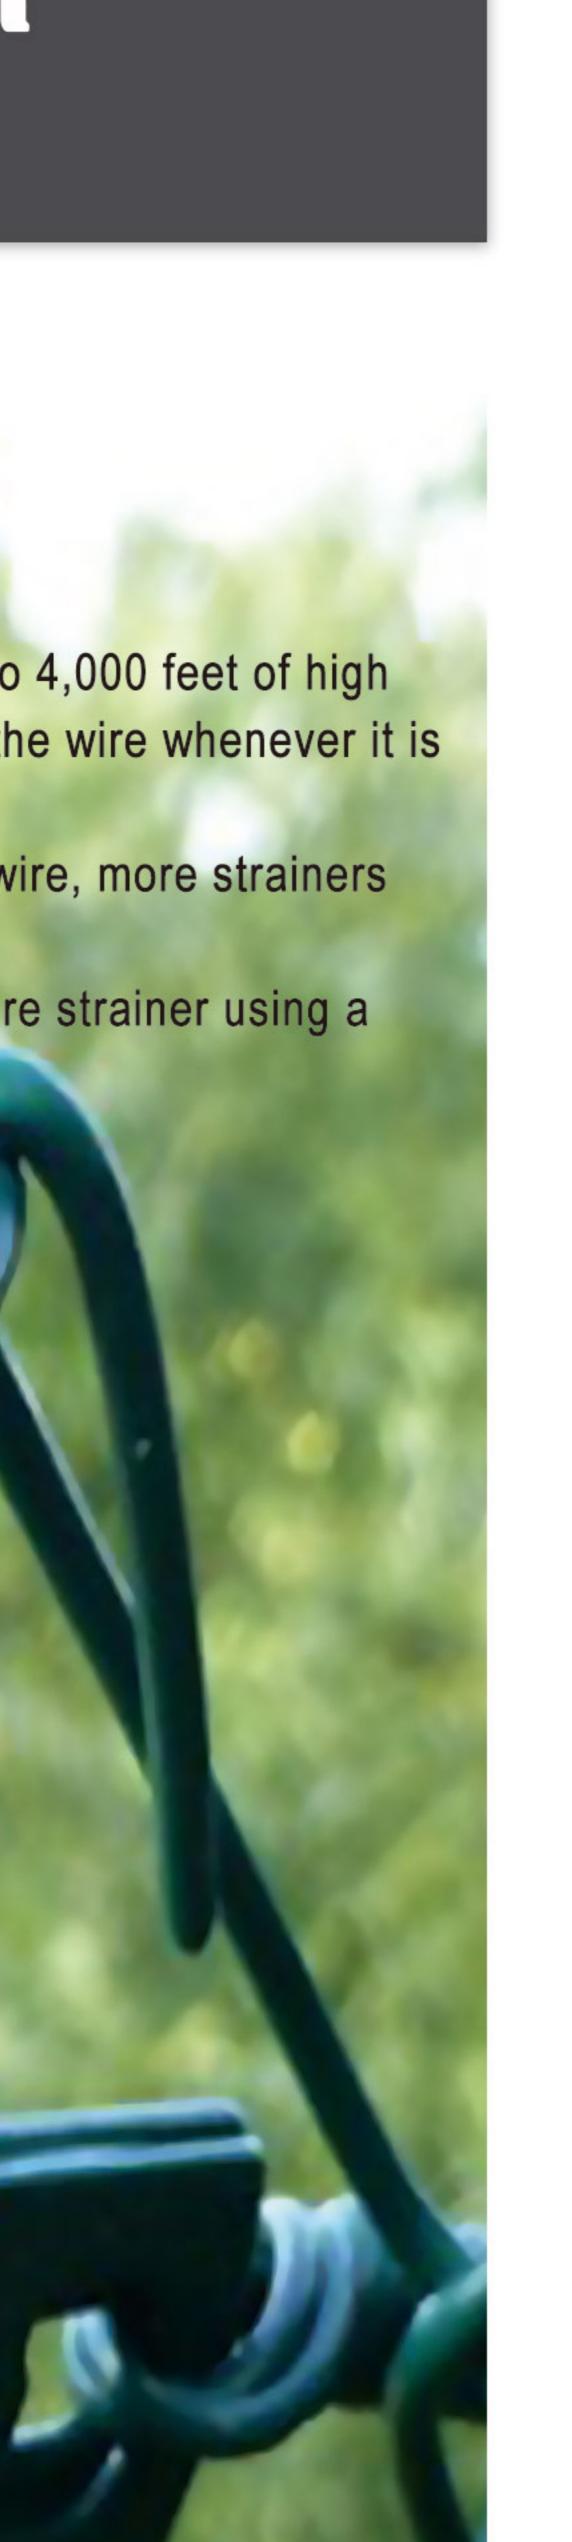

### Advantage:

Long life galvanised steel frame Robust, high quality locking clip

Increased spool hub thickness provides extra strength

Versatile use – traditionally for end of line straining or for in line straining by threading wire through strainer instead of tying an extra knot

Suitable for up to 4mm gauge fence wire

Fine adjustment and easy tightening action



# WIRE STRAINER

Length (mm) 100 / 120 / 125

Width (mm) 30 / 35 / 45

Height (mm) 30 / 35 / 45

Dia. (mm) 1-5

Weight (g) 80 / 90 / 100 / 120/ 180 / 200

Surface HDG / PC / EG



## BIRD SPIKE

Real environment



### Description:

Pest deterrent spikes are an excellent and cost-effective way to deter birds from landing or roosting on your home or property with its stainless

steel pointed spikes that act as a barrier.

Placed along edges and surfaces where birds like to perch, these humane spike strips prevent pests from causing mess and noise.

It's ideal for crows, gulls, pigeons and other large birds but can also deter cats and possums from climbing fences.

### Advantage:

Flexible to fit curved or flat surfaces

Easily cut the spike strips to custom length

Easy to install - can be glued, screwed or tied down

Humane, will not harm birds

Low cost, maintenance-free

Will not cut or injure installer!

Will not rust or break




## BIRD SPIKE

Spike Length (mm) 110

Spike Dia. (mm) 1.3 / 1.5

Spike No. (pcs) 40 / 60 / 75

Base Length (mm) 300 - 600

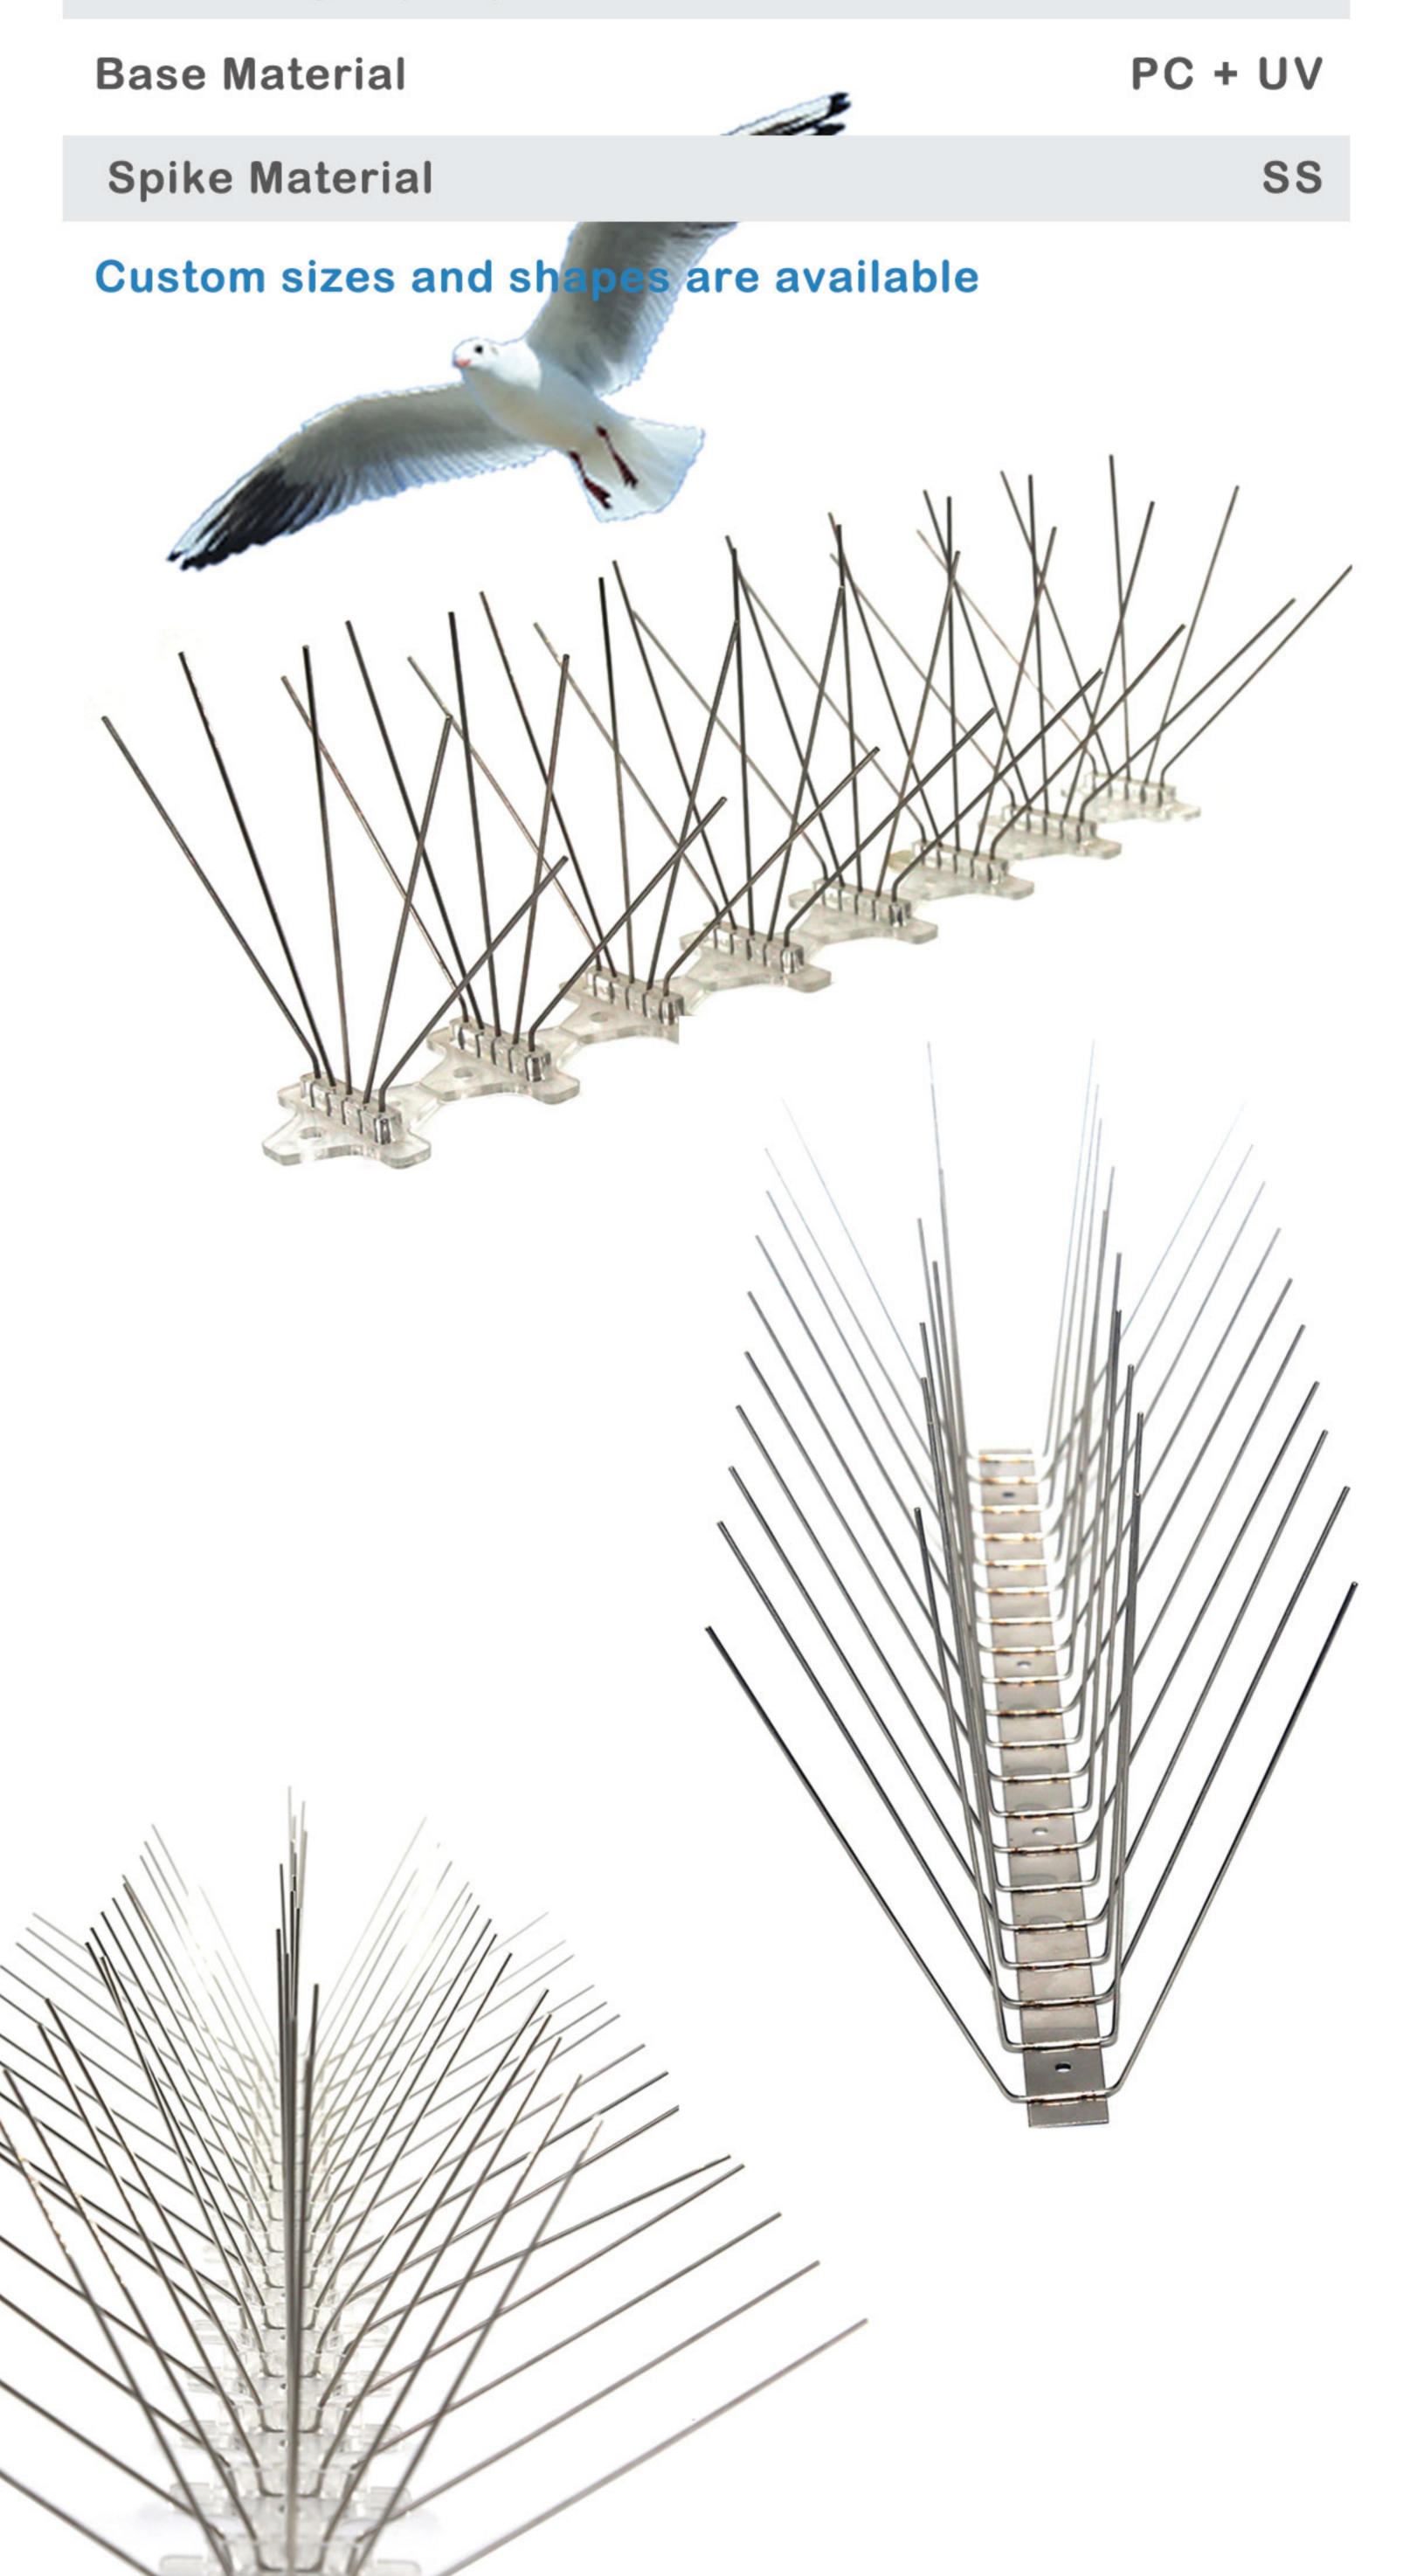








Length 4" - 12 "

Dia. (mm) 8 / 9 / 10 / 11 /12GA


Shape U/V/G

Surface Plain / PC / EG

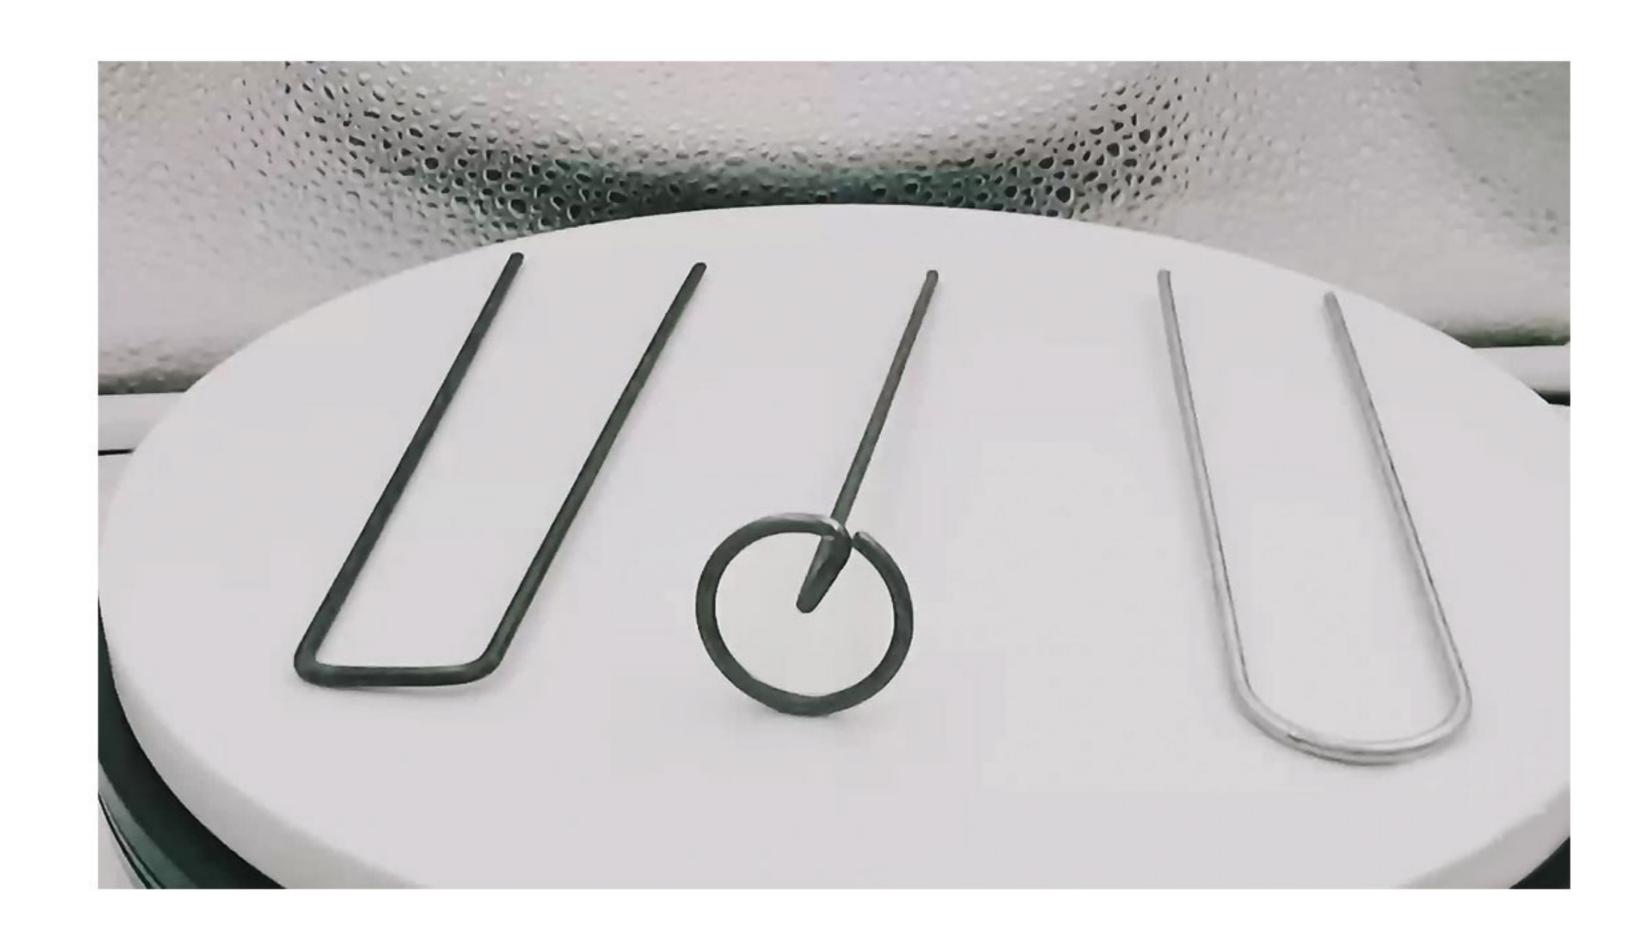





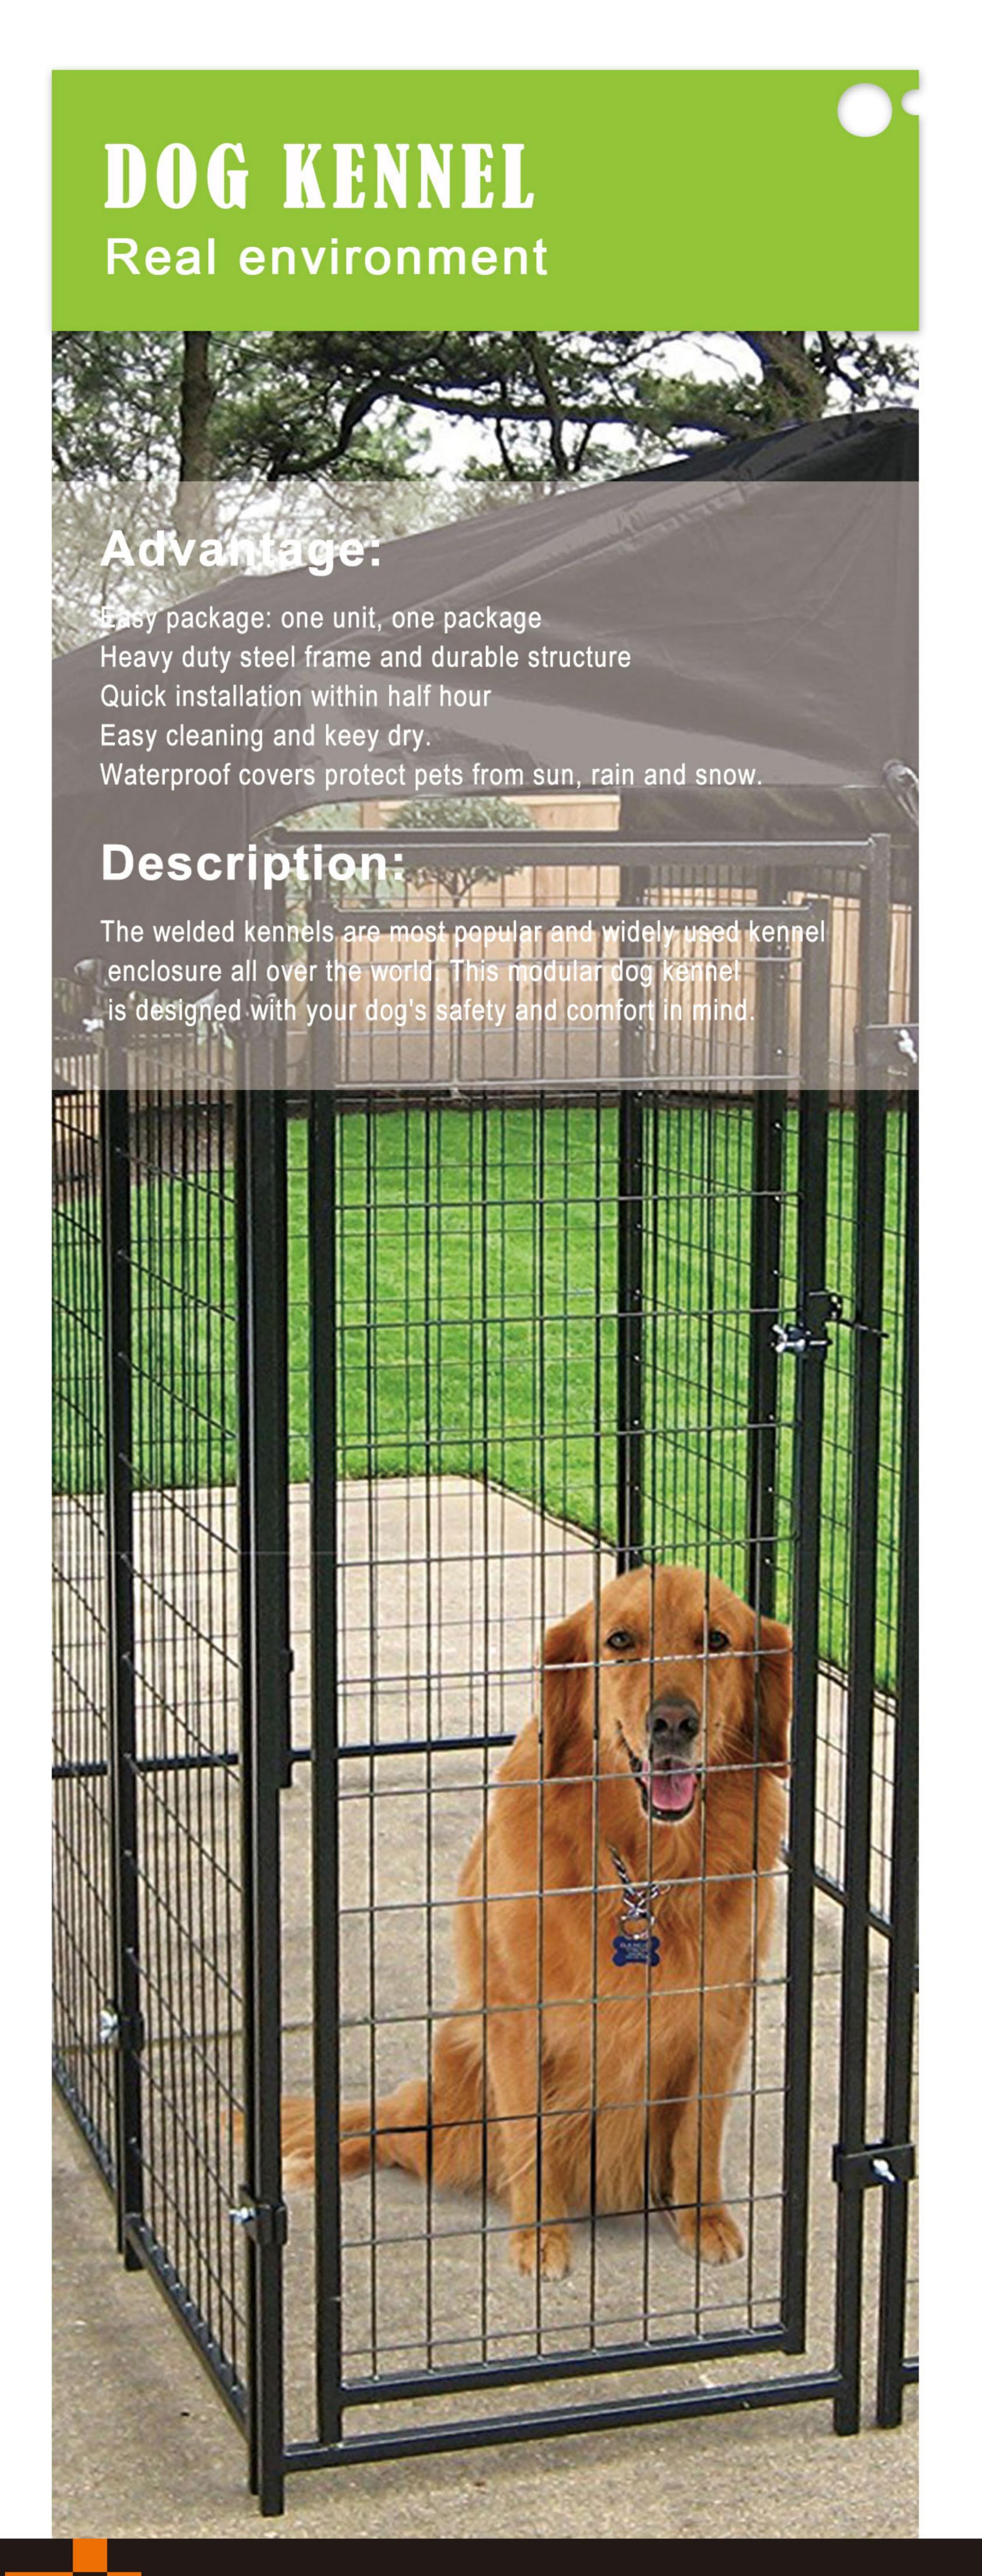




## WELDED DOG KENNEL

Length	4' / 5' / 8'/ 10'
Width	4' / 5' / 10'
Height	4' / 6'
Round tube dia.	1.25"
Square tube dia.	0.8" / 1.1"
Wire Dia. (mm)	8 / 11 /12GA
Mesh Opening	2" x 4"
Surface	HDG / PC





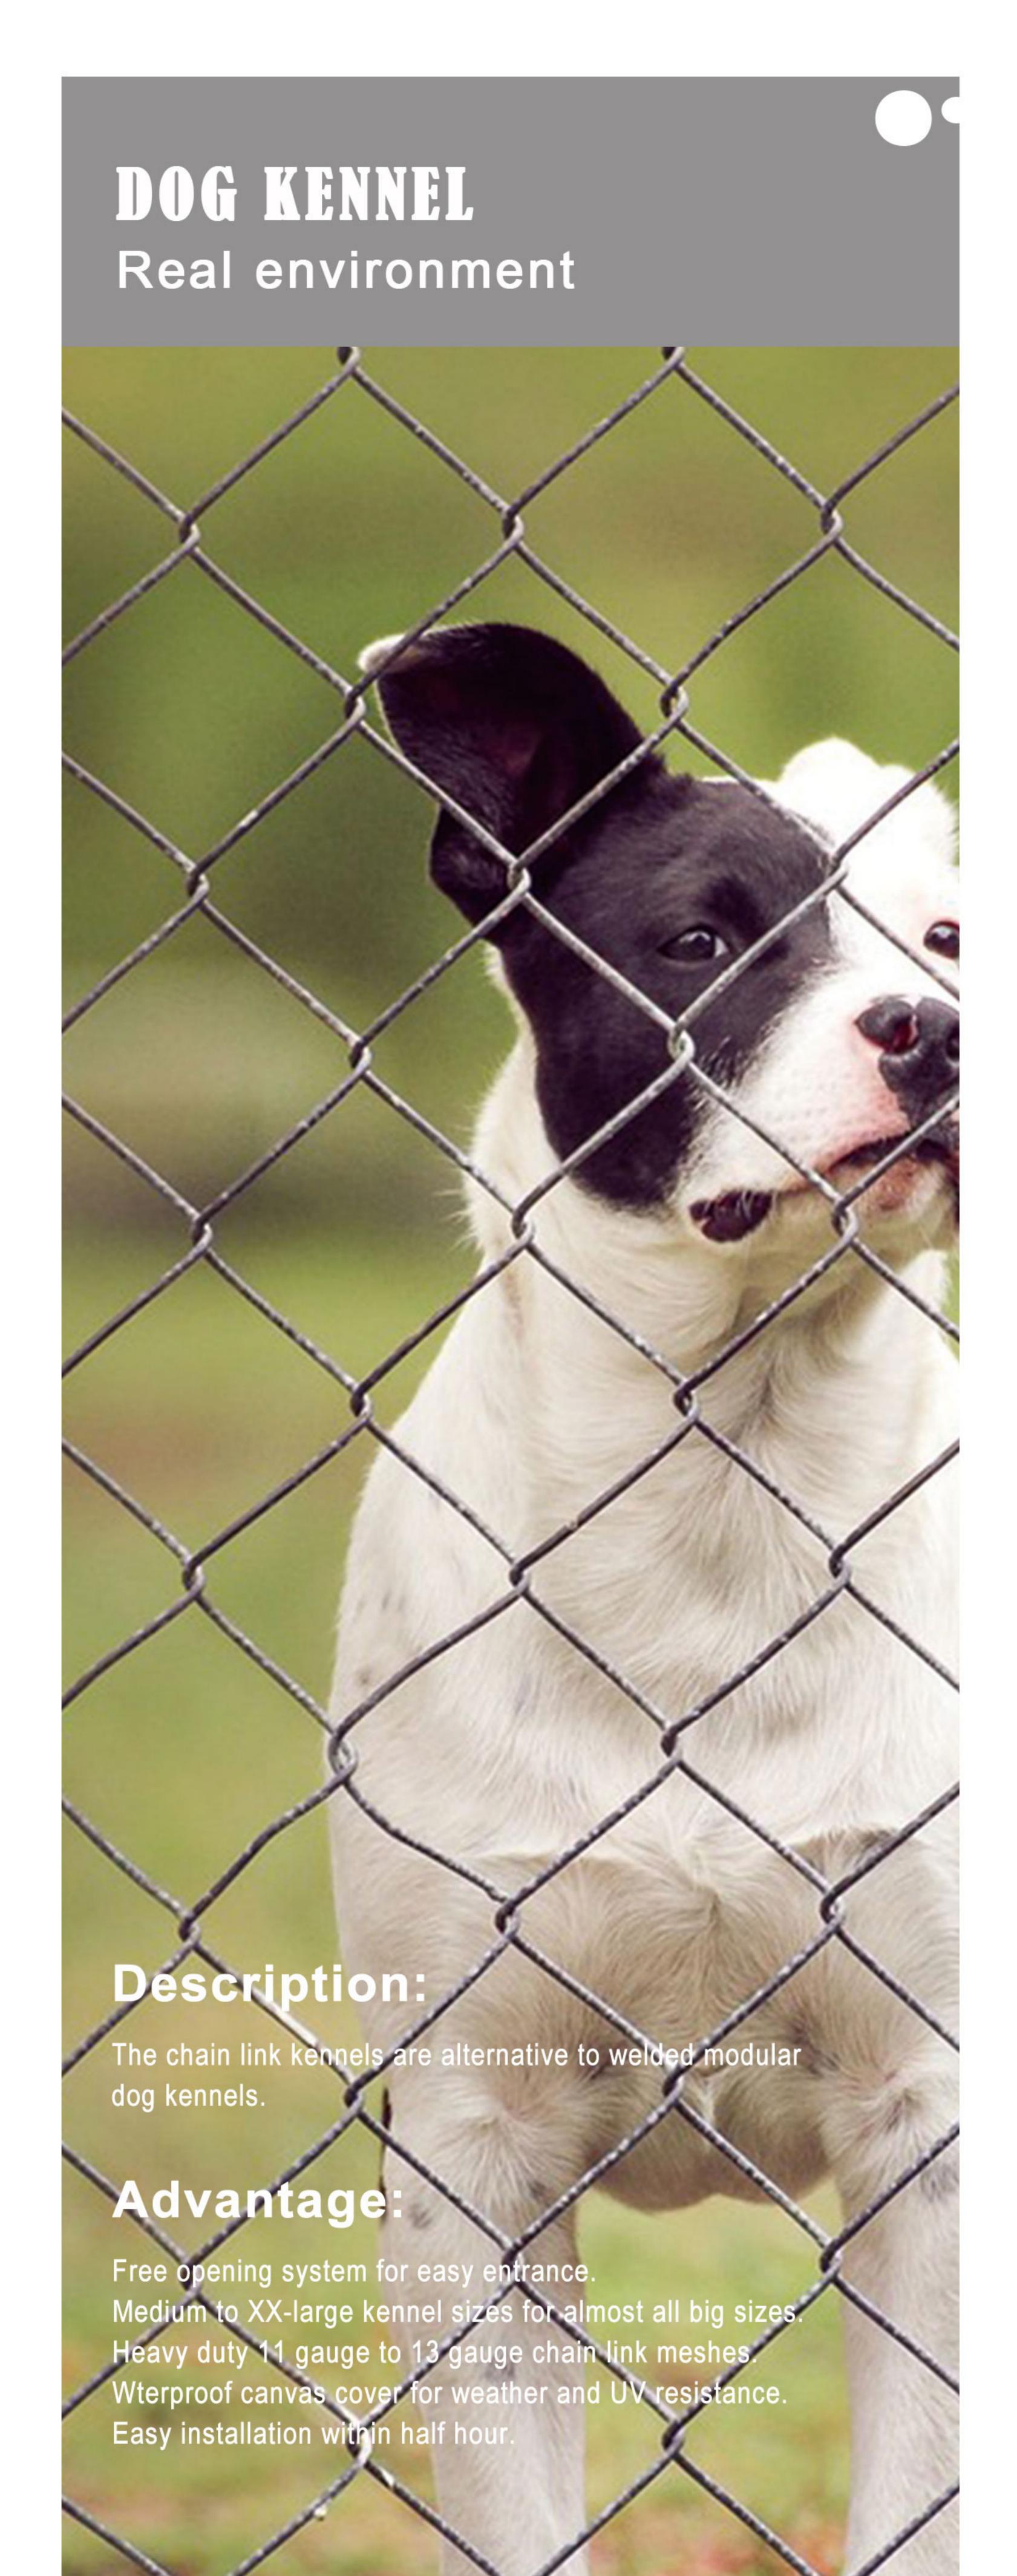



### CHAIN LINK DOG KENNEL

Length	7.5' / 10' / 13'
Width	7.5' / 10' / 13'
Height	4' / 6' / 7.5 / 10'
Tube dia.	1.25"
Wire Dia. (mm)	11 / 12 / 13GA
Mesh Opening	24" x 2.4"
Surface	HDG / PC
Custom sizes and shapes are available	



chain link dog kennel cover





### wire crate multiple size







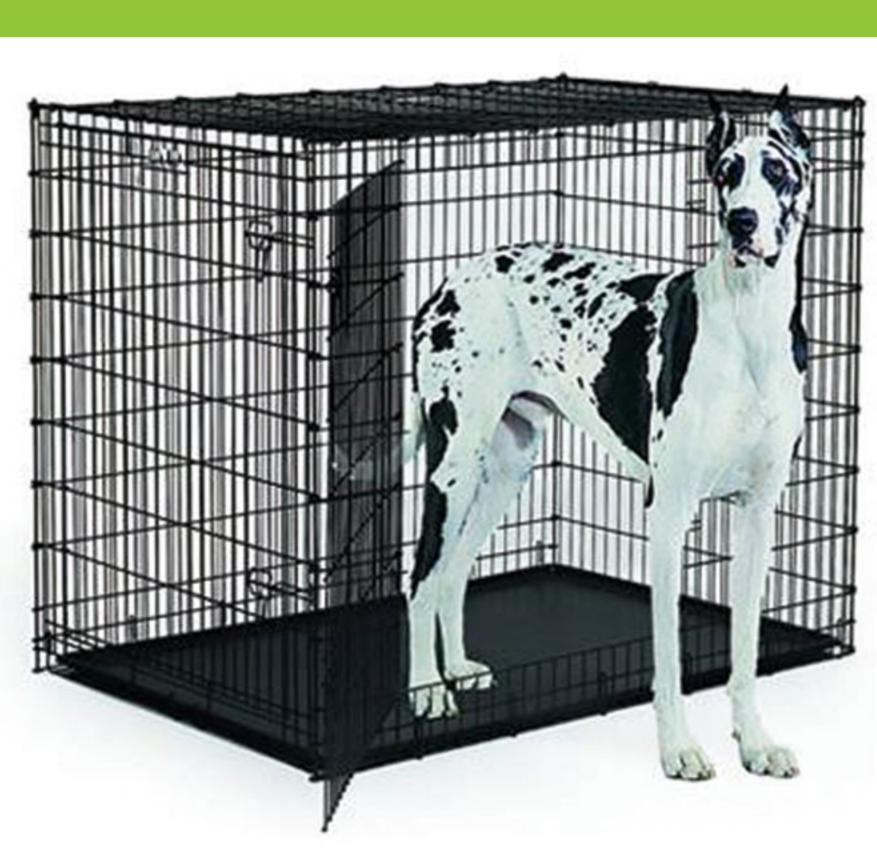

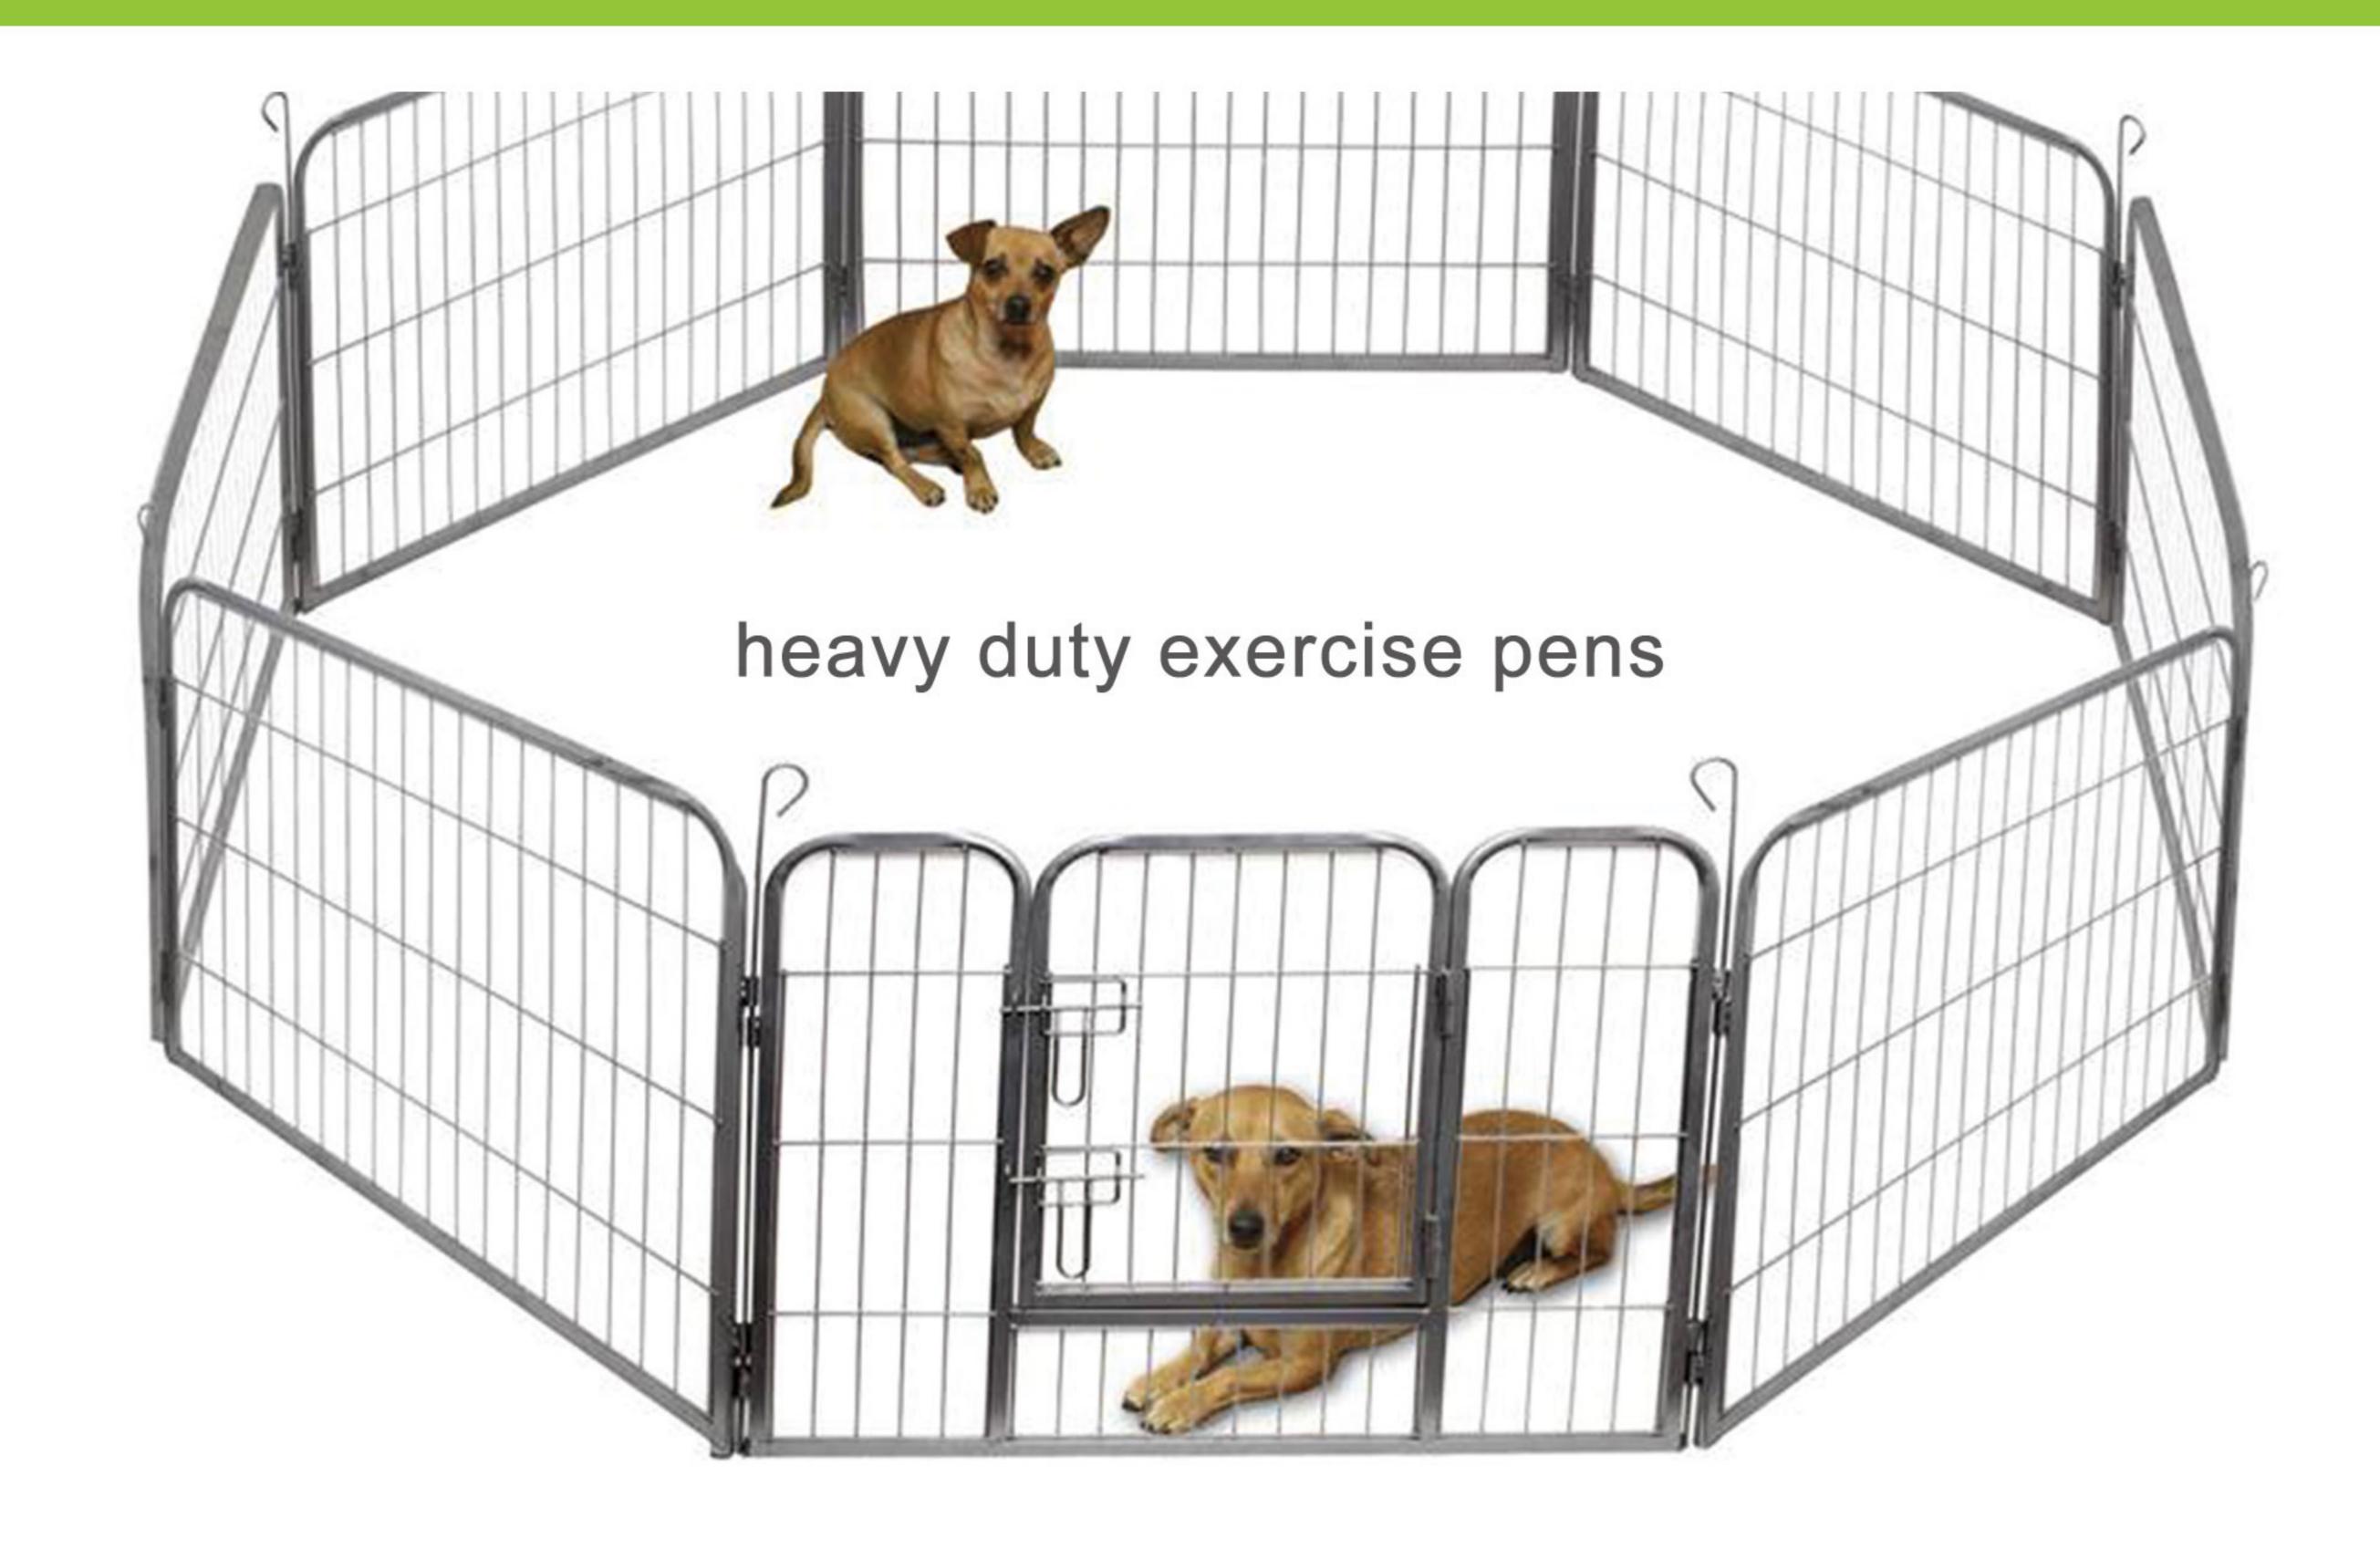

### BIKE STAND

Real environment



### Description:

Bike stand is the fastest way to help you save space, eliminate clutter, and streamline your cycle storage!

The bike rack is easy to assemble in a breeze, allowing you easily keep your bikes upright and organized.

Perfect for all standard child bikes, BMX, road and mountain bikes.

### Advantage:

Allow bikes parked in the same or opposite directions
Protective powder coated/HDG surface not easily rust, prolonging it service life
Sturdy and durable construction by premium square and round steel tubing
Weather-resistant anti-rust steel construction allows it being used outdoors
Easy to assemble and could be applied at home, school or just personal use



3-6

# BIKE STAND

Length 780-1650 Width (mm) 400

Height (mm) 240

Surface HDG / PC

Custom sizes and shapes are available


Space





#### Description:

Nail stakes are primarily used to secure wood or metal forms to the ground in all flatwork applications. Additionally, they are commonly used for attaching screed bar holder clamps in flatwork finishing, securing landscape timbers, surveying stakes, string line guides, securing metal forms with pockets, and securing wood forming for flatwork.

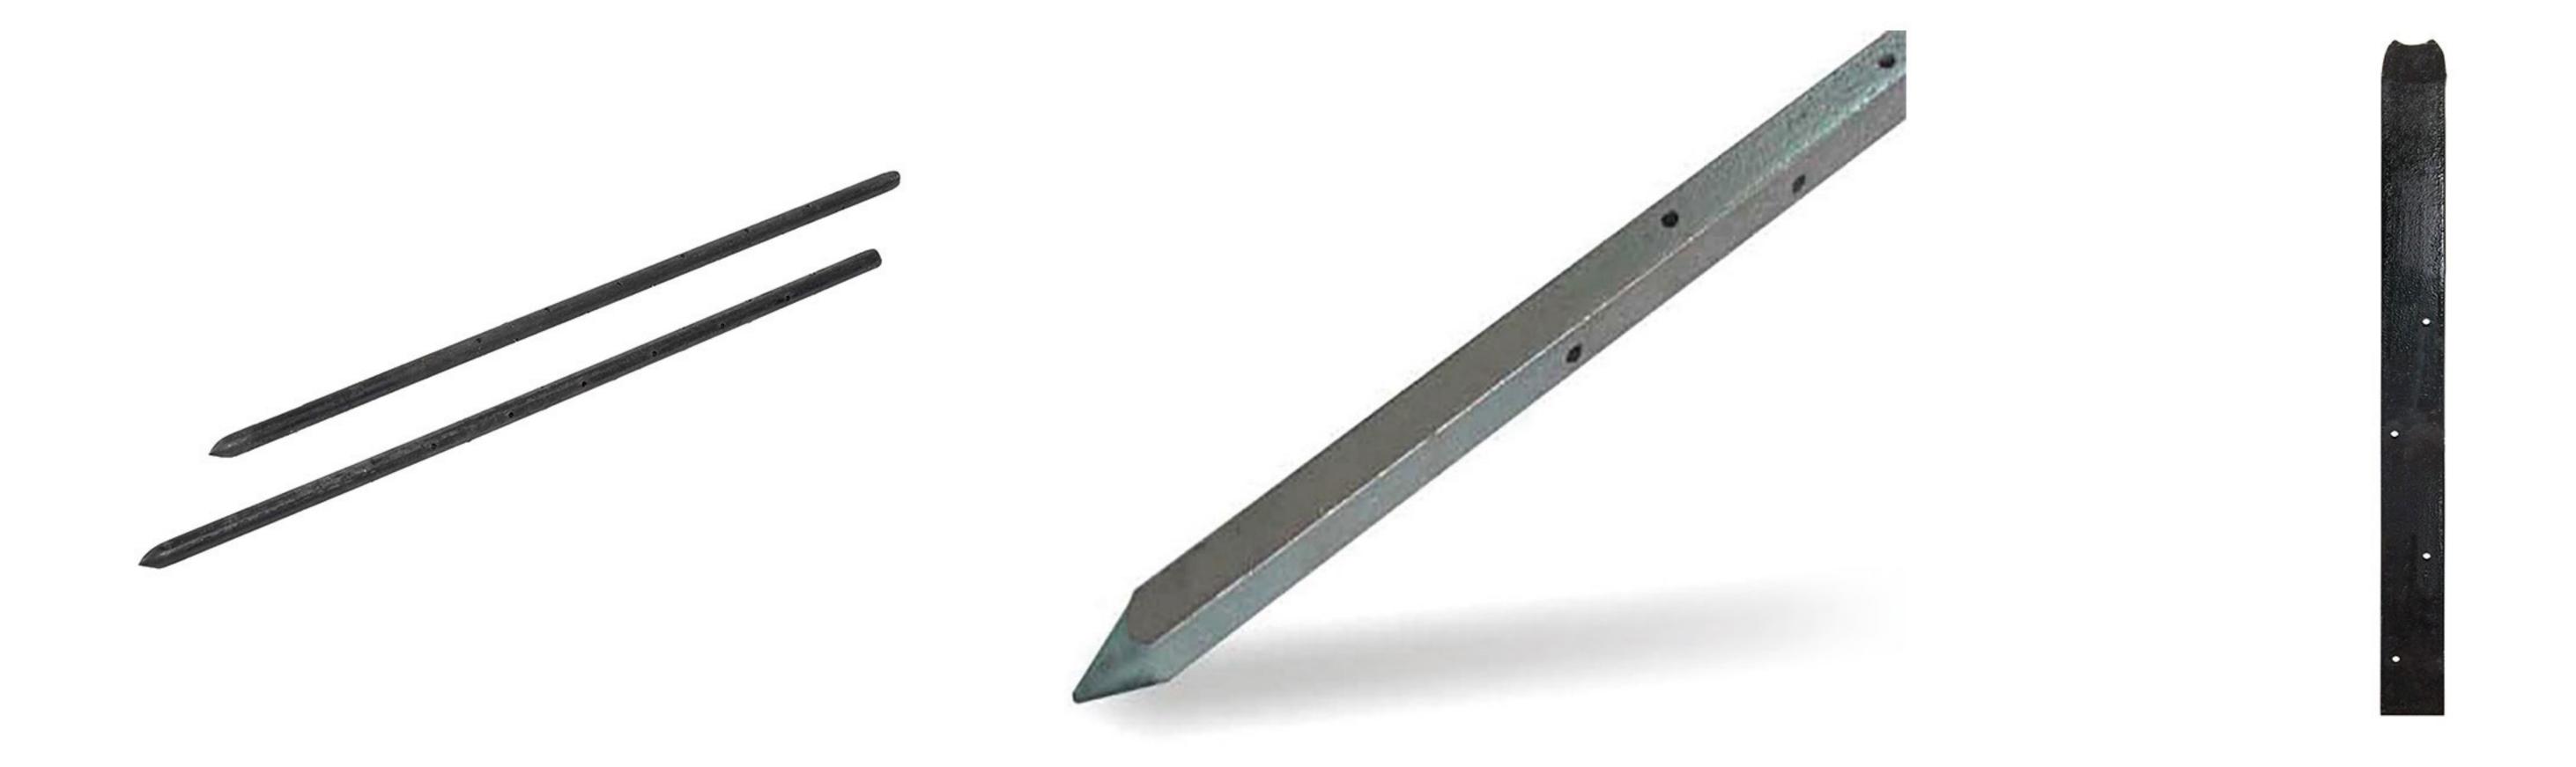

Dia. 3/4", 5/8", 7/8, 1", 1-1/2"

Length 12", 18", 24", 30", 36", 42" 48"

Hole No. 4 / 8 / 10 / 12 / 14

Shape Round, Square, Flat

Surface Painted Black or Oiled

Custom sizes and shapes are available

#### Advantage:


Nail holes keep the nail in place during alignment

Eliminates splitting, twisting and splintering

Requires only one nail per stake, making board damage almost non-existent

Extremely strong

Chamfered ring machined in around the stake top prevents peening and increases stake life

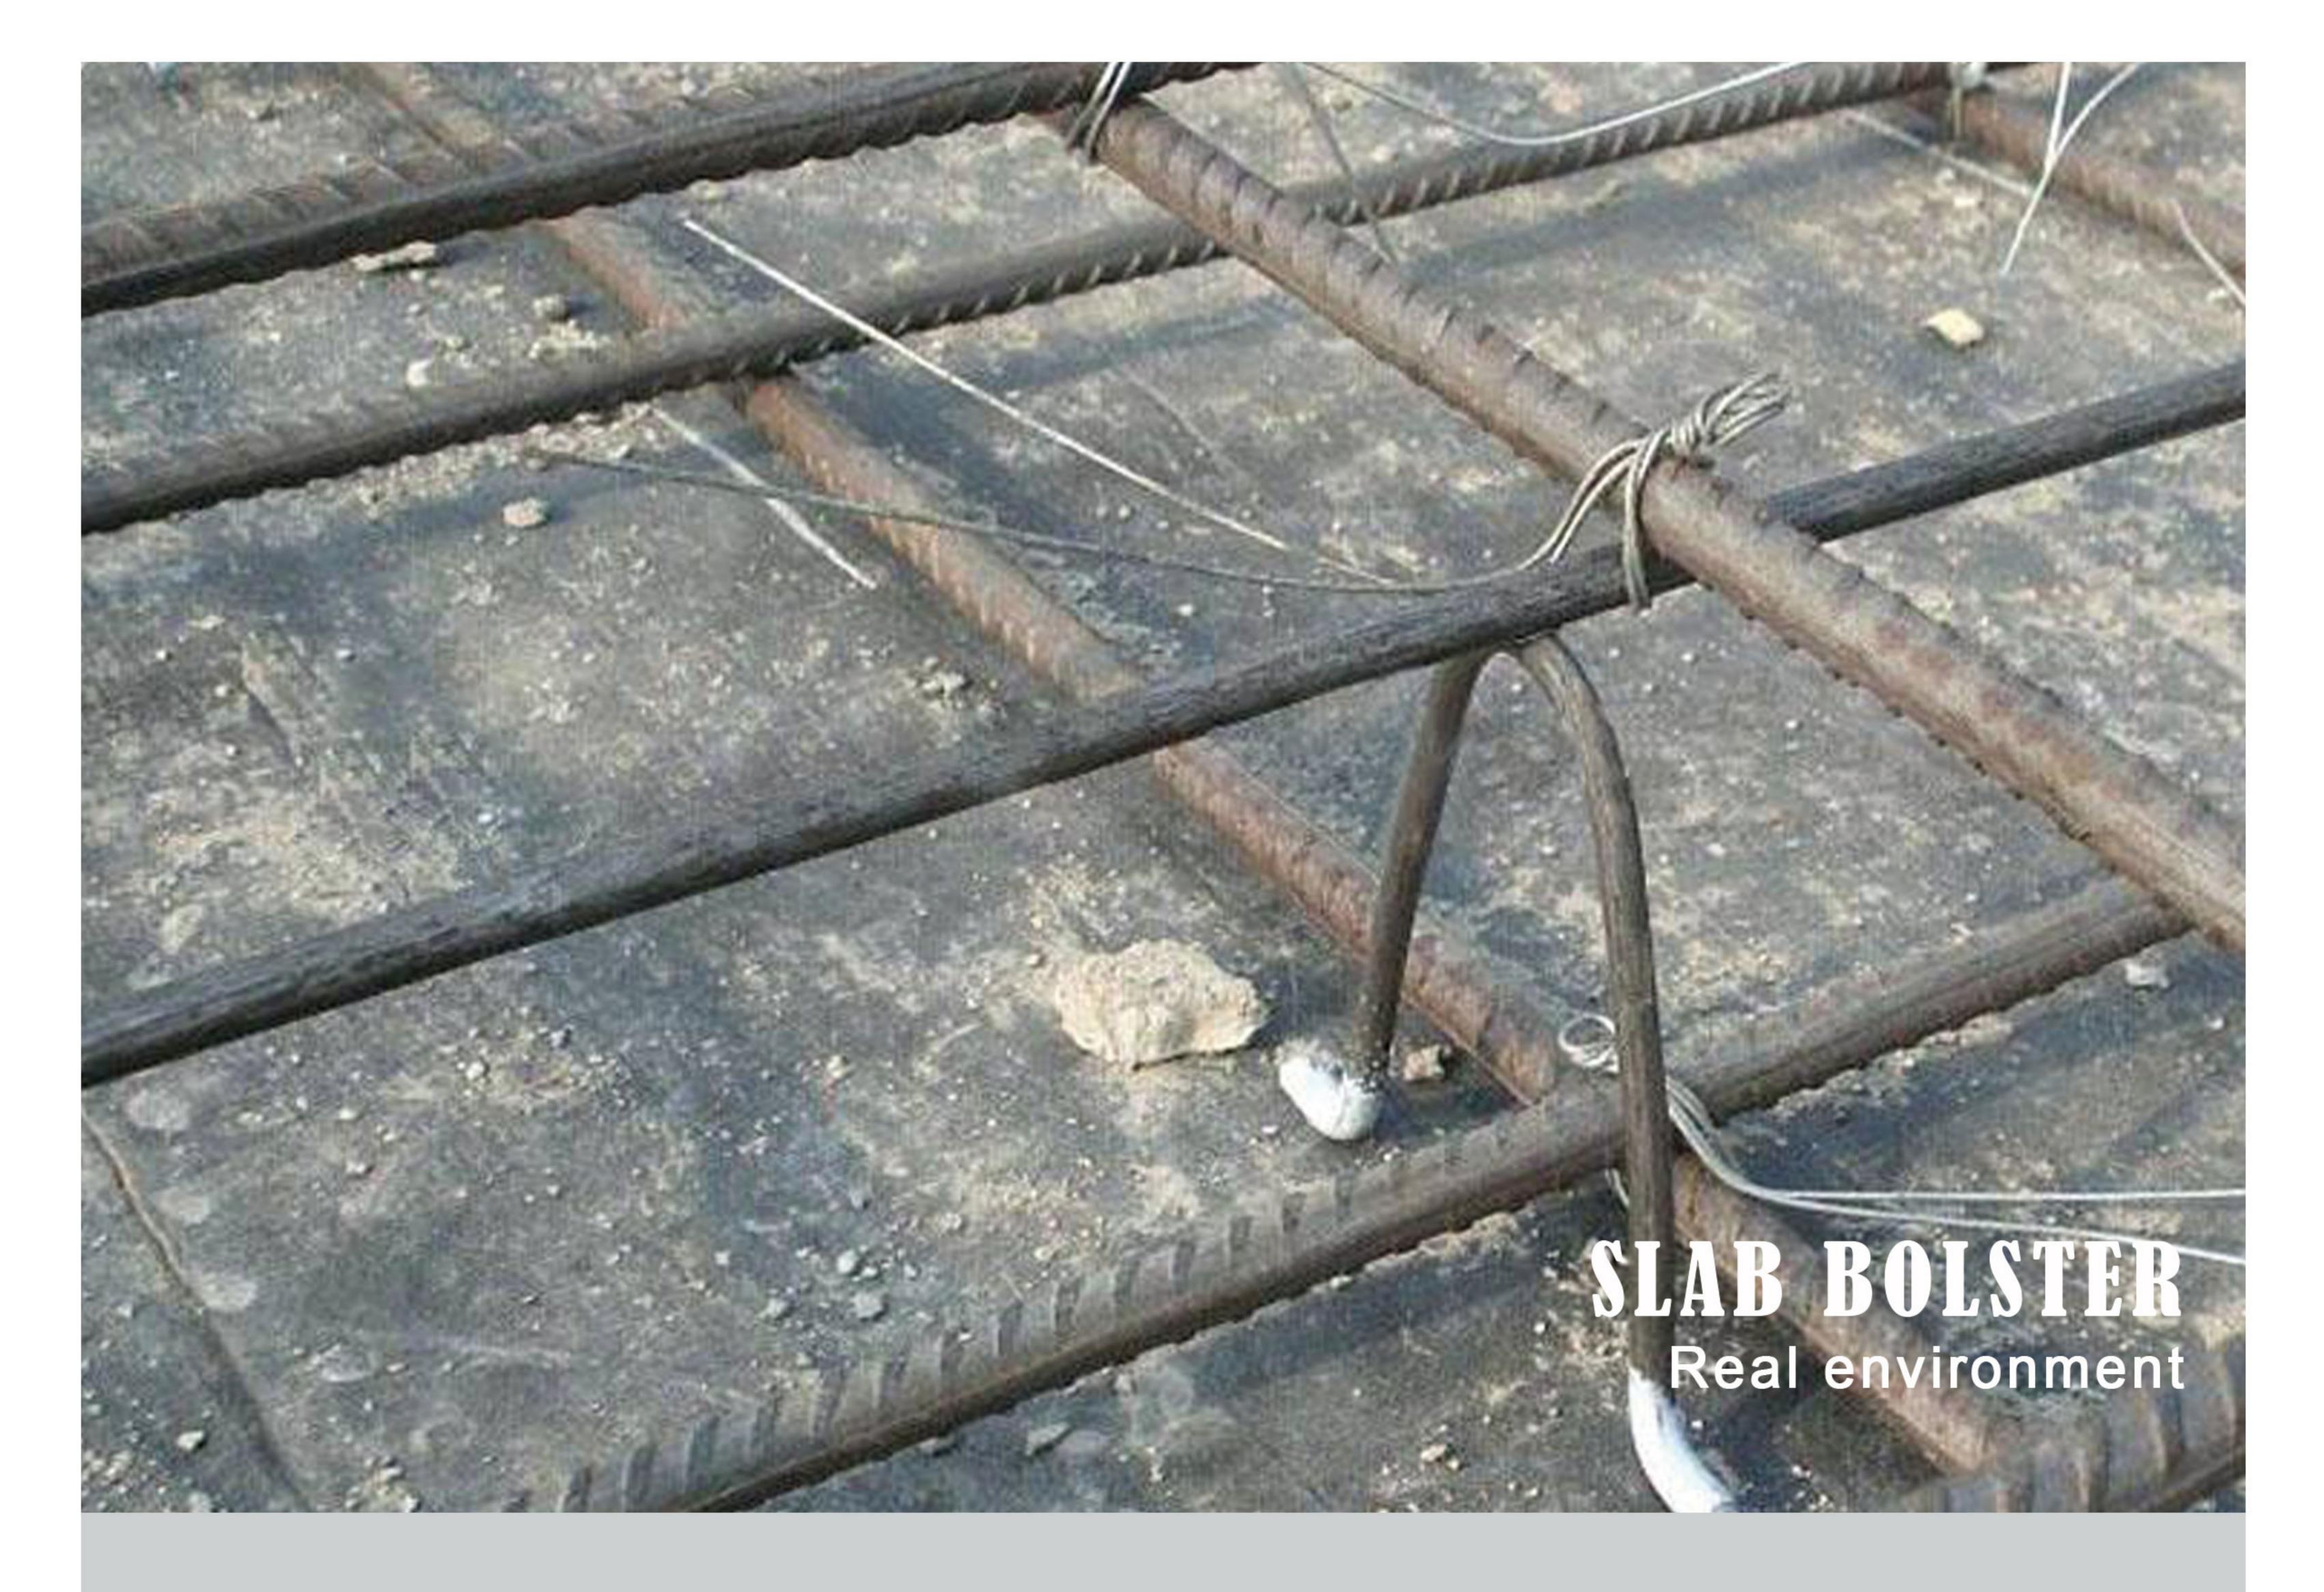

### Advantage:

Slab bolster Support one layer of steel above another and space them to required distance.

SLAB BOLSTER

Material Steel
Length(mm) 5-10"
Height 1/2"-3"
Surface Plain / Dipped / Epoxy







### Description:

Plastic Rebar Chair for concrete support are used to support the rebar mats or cages at the desired heights

in order to achieve proper concrete coverage and maximize the benefit of reinforcing steel.



Material

**Plastic** 

**Concrete Cover** 

1 1/2" - 2"

For Bar Dia.

1/2"-3"









### Advantage:

Highly visible orange increases worker visibility of rebar runs.

Provides some protection from scratches of rebar termination points.

Reusable

Excellent marking tool for all rebar work

Can be used for landscape, survey and stake marking







Material

For bar size (mm) 8-40

Pattern Round

Custom sizes and shapes are available

Round / Mushroom / Reinforced



### SHEAN IRON STEEL CO.,LTD

Cangzhou City, Hebei Province, China. 061100.

Tel: +86-317-3047113

Mobile/whatsapp:+8618875770627

Mail: sheanscrew@gmail.com https://screwpostanchor.com/

